CERAMICA DAUGRES ITALIA S.R.L.
Fiorano Modenese (mo)via Pedemontana 100 Cap 41042 Italy

DAUGRES(CHINA)
Block 7, NO.88 Zhongshan 6th Road, Torch Development Zone Big Data Center, Zhongshan, Guangdong, P.R.China.

ANDES

HIGH STYLE & ITALIAN DESIGN

The design of Daugres products is realized in Italy. Through creativity, technical skills and Italian culture, Daugres designs cutting-edge surfaces, always up with interior design trends.

The “Italian Design” brand distinguishes all the collections thought and designed in Italy to promote an innovative product, with unsurpassable aesthetic qualities, immune to fashion and time.








SIZE INDEX

ANDES

Stone **Collection**



	IVORY	CLOUD	ASH	COAL
600X1200 10mm	NAT	NAT	NAT	NAT
600X600 9.5mm	NAT	NAT	NAT	NAT

TECHNICAL CHARACTERISTIC

- WATER ABSORPTION
- STAIN RESISTANCE
- SURFACE ABRASION
- CHEMICALS RESISTANCE
- BREAKING STRENGTH


SURFACE

NAT NATURALE

PACKAGING

	Pcs/Box	M²/Box	Kg/Box	Boxes/PLT	M²/PLT	Kg/PLT
600X1200 10mm	2	1.44	33.50	44	63.36	1494.00
600X1200 10mm	2	1.44	33.50	28	43.32	958.00
600X600 9.5mm	4	1.44	31.50	32	46.08	1028.00



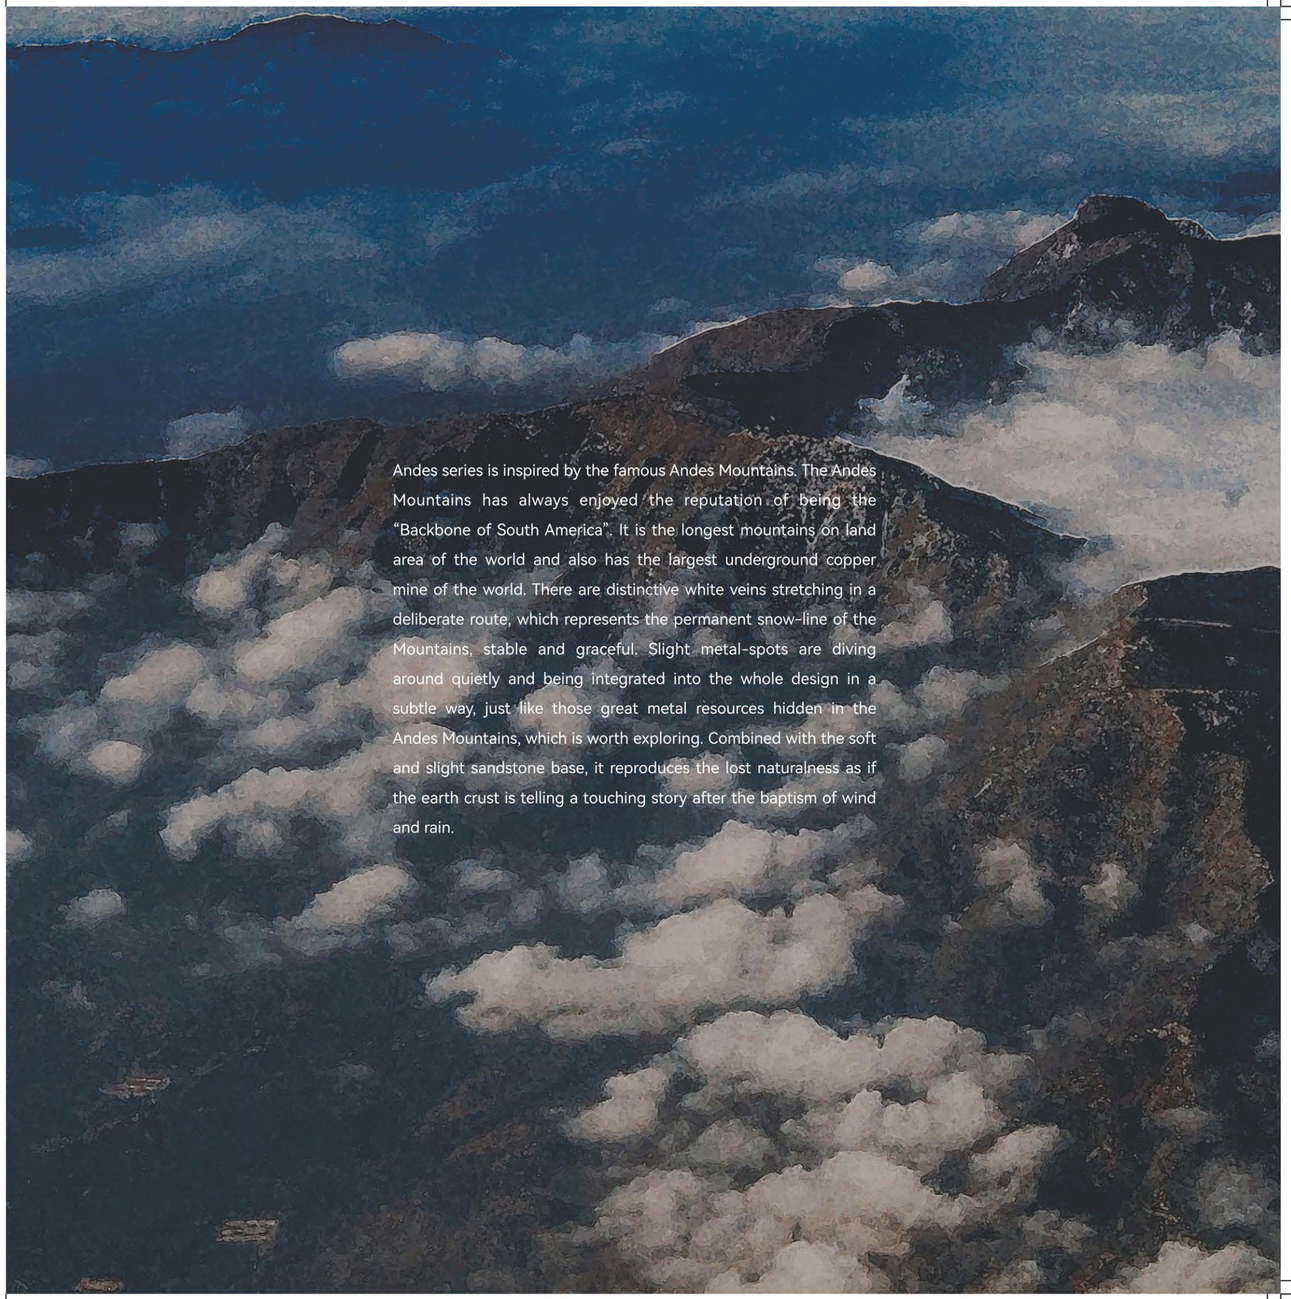

Andes series is inspired by the famous Andes Mountains. The Andes Mountains has always enjoyed the reputation of being the "Backbone of South America". It is the longest mountains on land area of the world and also has the largest underground copper mine of the world. There are distinctive white veins stretching in a deliberate route, which represents the permanent snow-line of the Mountains, stable and graceful. Slight metal-spots are diving around quietly and being integrated into the whole design in a subtle way, just like those great metal resources hidden in the Andes Mountains, which is worth exploring. Combined with the soft and slight sandstone base, it reproduces the lost naturalness as if the earth crust is telling a touching story after the baptism of wind and rain.


IVORY

IVORY

NATURALE SURFACE

600X1200MM BS126S21

600X600MM BS66S21




FLOOR/ IVORY / 600X600MM

IVORY

FLOOR

IVORY / 600X1200MM

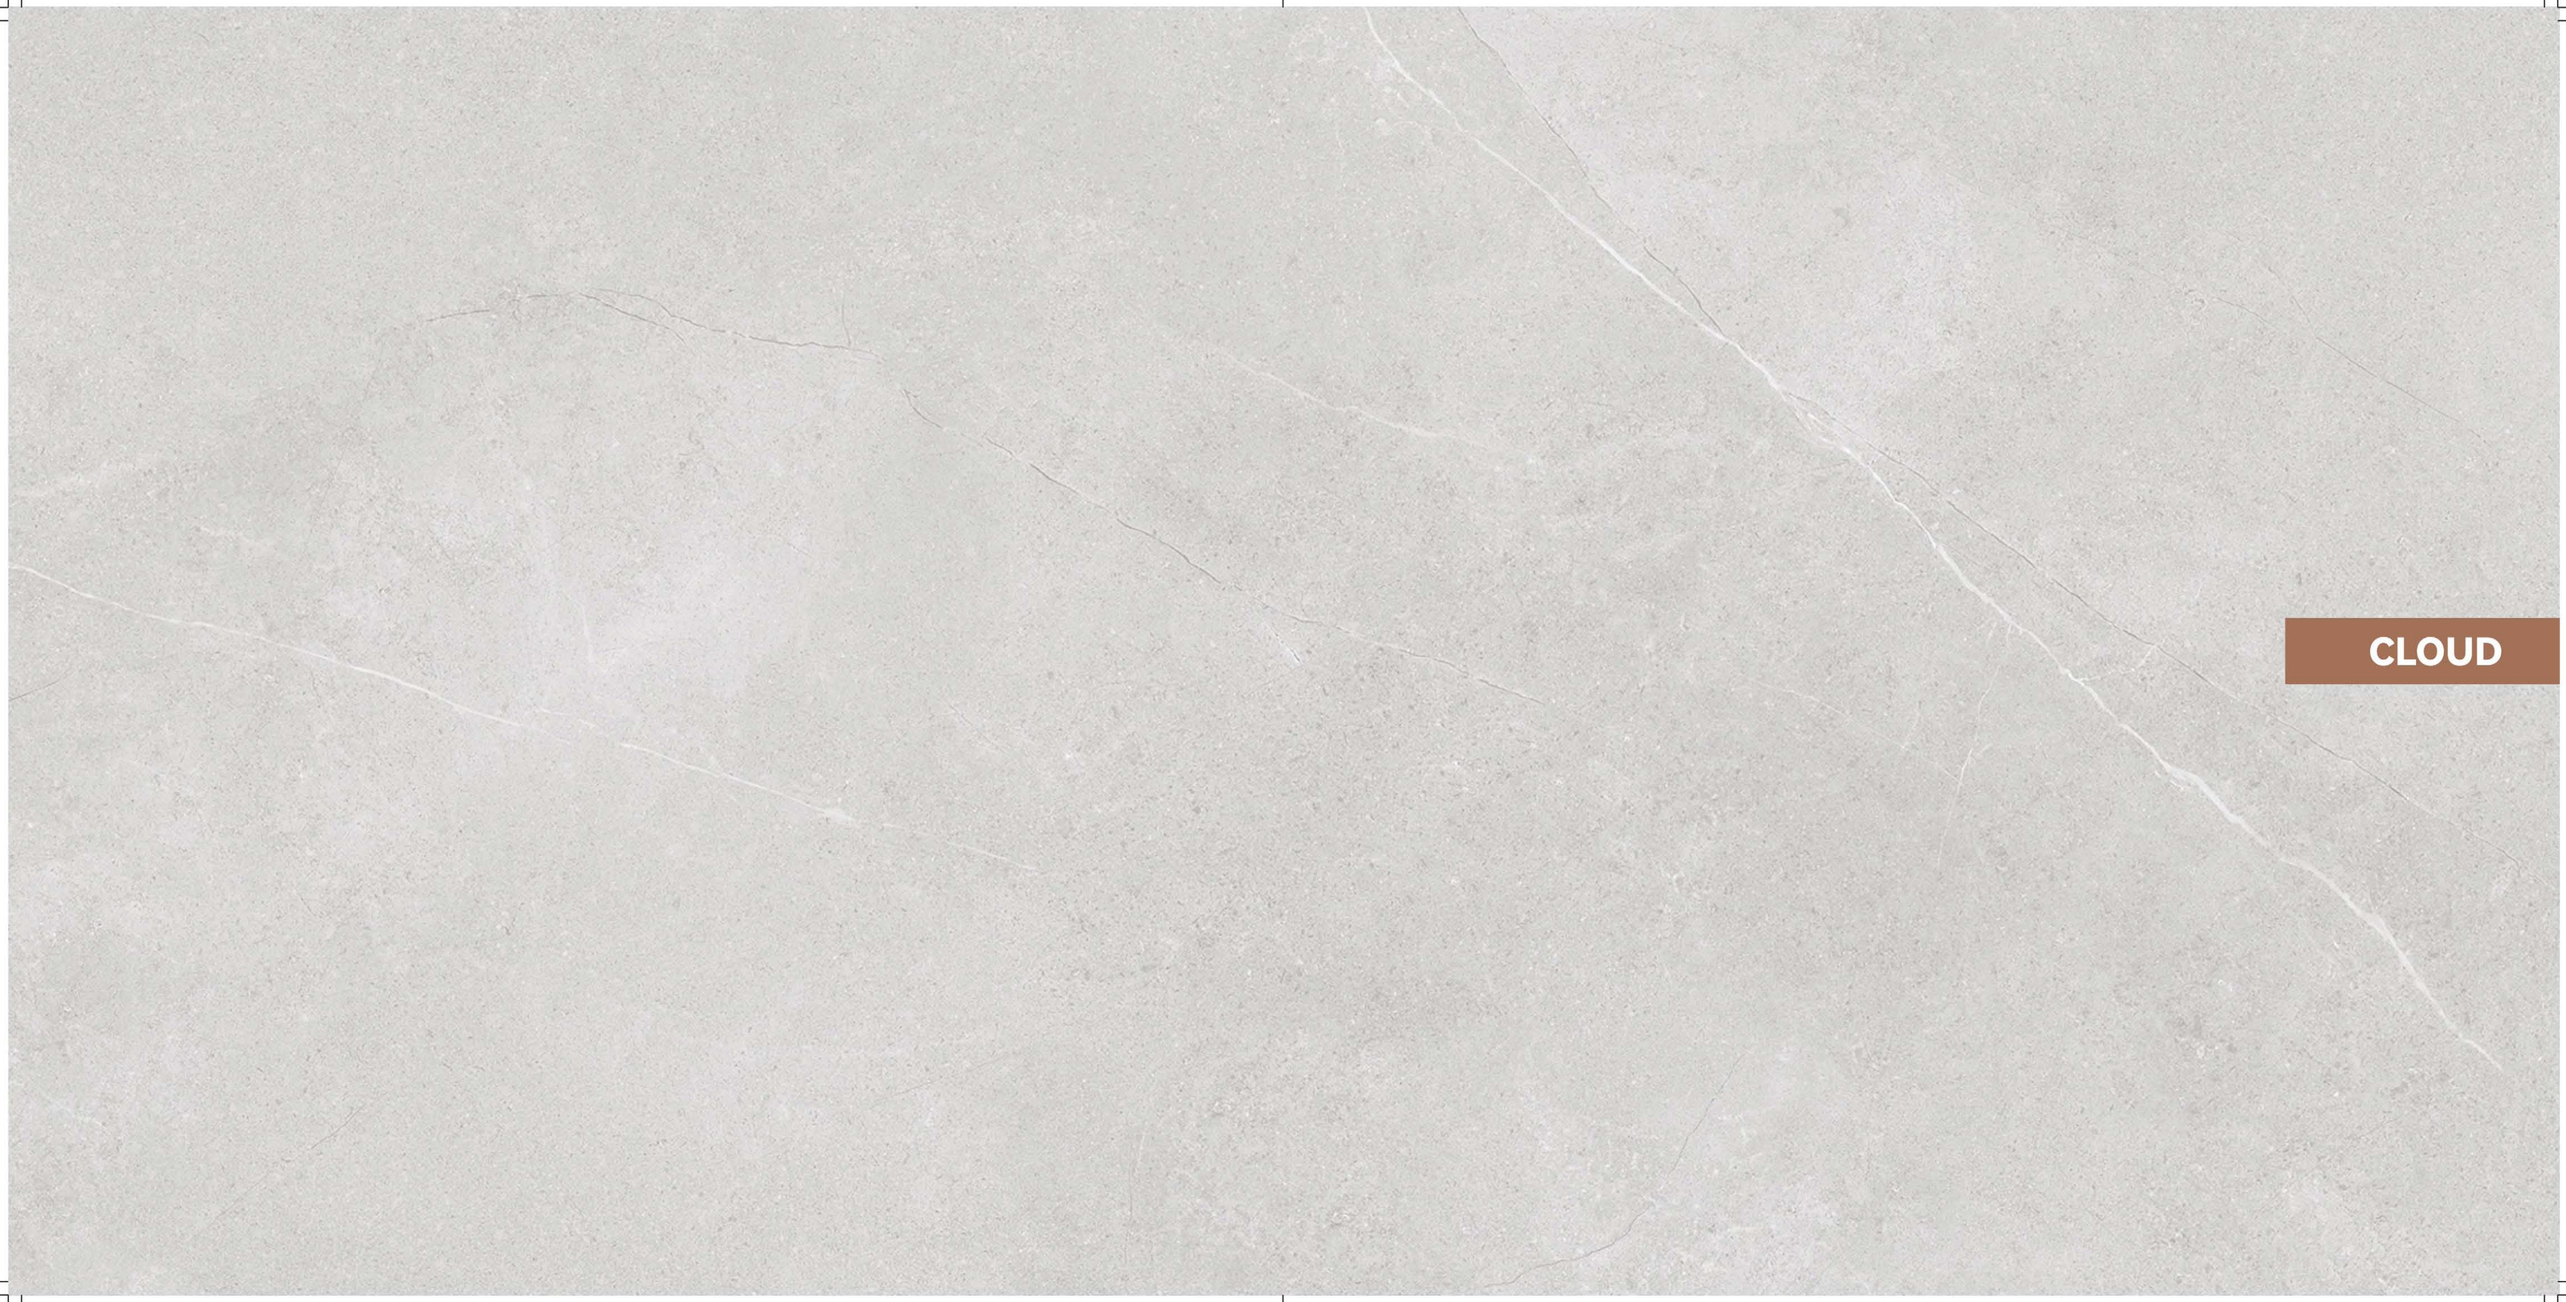


CLOUD

CLOUD

NATURALE SURFACE



600X1200MM BS126S23



600X600MM BS66S23



WALL & FLOOR/ IVORY / 600X1200MM

CLOUD

FLOOR

CLOUD / 600X600MM




ASH

ASH

NATURALE SURFACE



600X1200MM BS126S24



600X600MM BS66S24



FLOOR/ ASH / 600X1200MM

ASH

FLOOR


ASH / 600X600MM




COAL

COAL

NATURALE SURFACE

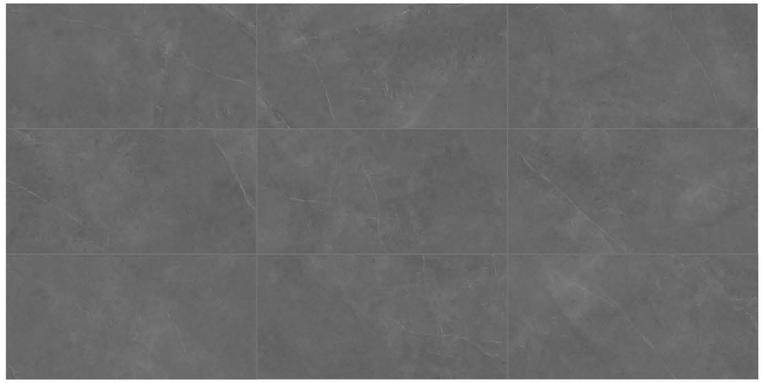

600X1200MM BS126S27



600X600MM BS66S27



WALL/ COAL / 600X600MM

COAL

FLOOR

COAL / 600X1200MM



TECHNICAL CHARACTERISTICS

TECHNICAL CHARACTERISTICS		TEST METHOD	REQUIRED VALUE	DAUGRES VALUE [Average]
Length and Width	DIMENSIONS	GB/T 3810.2 ISO 10545.2	± 0.6%	± 0.2%
Thickness			± 5%	± 3%
Straightness of sides			± 0.5%	± 0.2%
Rectangularity			± 0.5%	± 0.2%
Surface flatness			±2.0MM Maximum	±0.5MM
Water Absorption		GB/T 3810.3 ISO 10545.3	Average maximum ≤0.5%	≤0.3%
Breaking Strength		GB/T 3810.4 ISO 10545.4	When the thickness ≥7.5mm,the mean value shall not be less than 1300N	Conformed
Modulus of Rupture		GB/T 3810.4 ISO 10545.4	Average maximum ≥35MPa	≥38MPa
Stain Resistance		GB/T 3810.14 ISO 10545.14	Minimum Class 3	Class 5
Chemicals Resistance		GB/T 3810.13 ISO 10545.13	Minimum GB	GA
Static coefficient of friction		GB/T 4100-2015(Annex M)	Individual ≥0.50	≥0.60
Crazing resistance		GB/T 3810.11 ISO 10545.11	No crazing or peeling on the glazed surface after the crazing test	Conformed
Slip Resistance		DIN 51130: 2014	Declared Value	Naturale R10

Uniform Appearance V1	Slight Variation V2	Moderate Variation V3	Substantial Variation V4