CERAMICA DAUGRES ITALIA S.R.L.
Fiorano Modenese Anolvia Pedemontana 100 Cap 41042 Italy

DAUGRES(CHINA)
Block 7, NO.88 Zhongshan 4th Road, Torch Development Zone Big Data Center, Zhongshan, Guangdong, P.R.China.

BALANCE STONE

DAUGRES
Italian Design

HIGH STYLE & ITALIAN DESIGN

The design of Daugres products is realized in Italy. Through creativity, technical skills and Italian culture, Daugres designs cutting-edge surfaces, always up with interior design trends.

The “Italian Design” brand distinguishes all the collections thought and designed in Italy to promote an innovative product, with unsurpassable aesthetic qualities, immune to fashion and time.








SIZE INDEX

BALANCE STONE

Stone **Collection**



	WHITE	SAND	GREY	ANTRACITE
600X1200 10mm	NAT	NAT	NAT	NAT
600X600 9.5mm	NAT	NAT	NAT	NAT

TECHNICAL CHARACTERISTIC

WATER ABSORPTION · STAIN RESISTANCE · SURFACE ABRASION · CHEMICALS RESISTANCE · BREAKING STRENGTH

SURFACE

NAT NATURALE

PACKAGING

	Pcs/Box	M²/Box	Kg/Box	Boxes/PLT	M²/PLT	Kg/PLT
600X1200 10mm	2	1.44	33.50	44	63.36	1494.00
600X1200 10mm	2	1.44	33.50	28	40.32	958.00
600X600 9.5mm	4	1.44	31.50	32	46.08	1028.00
300X600 9.5mm	8	1.44	31.00	32	46.08	1012.00



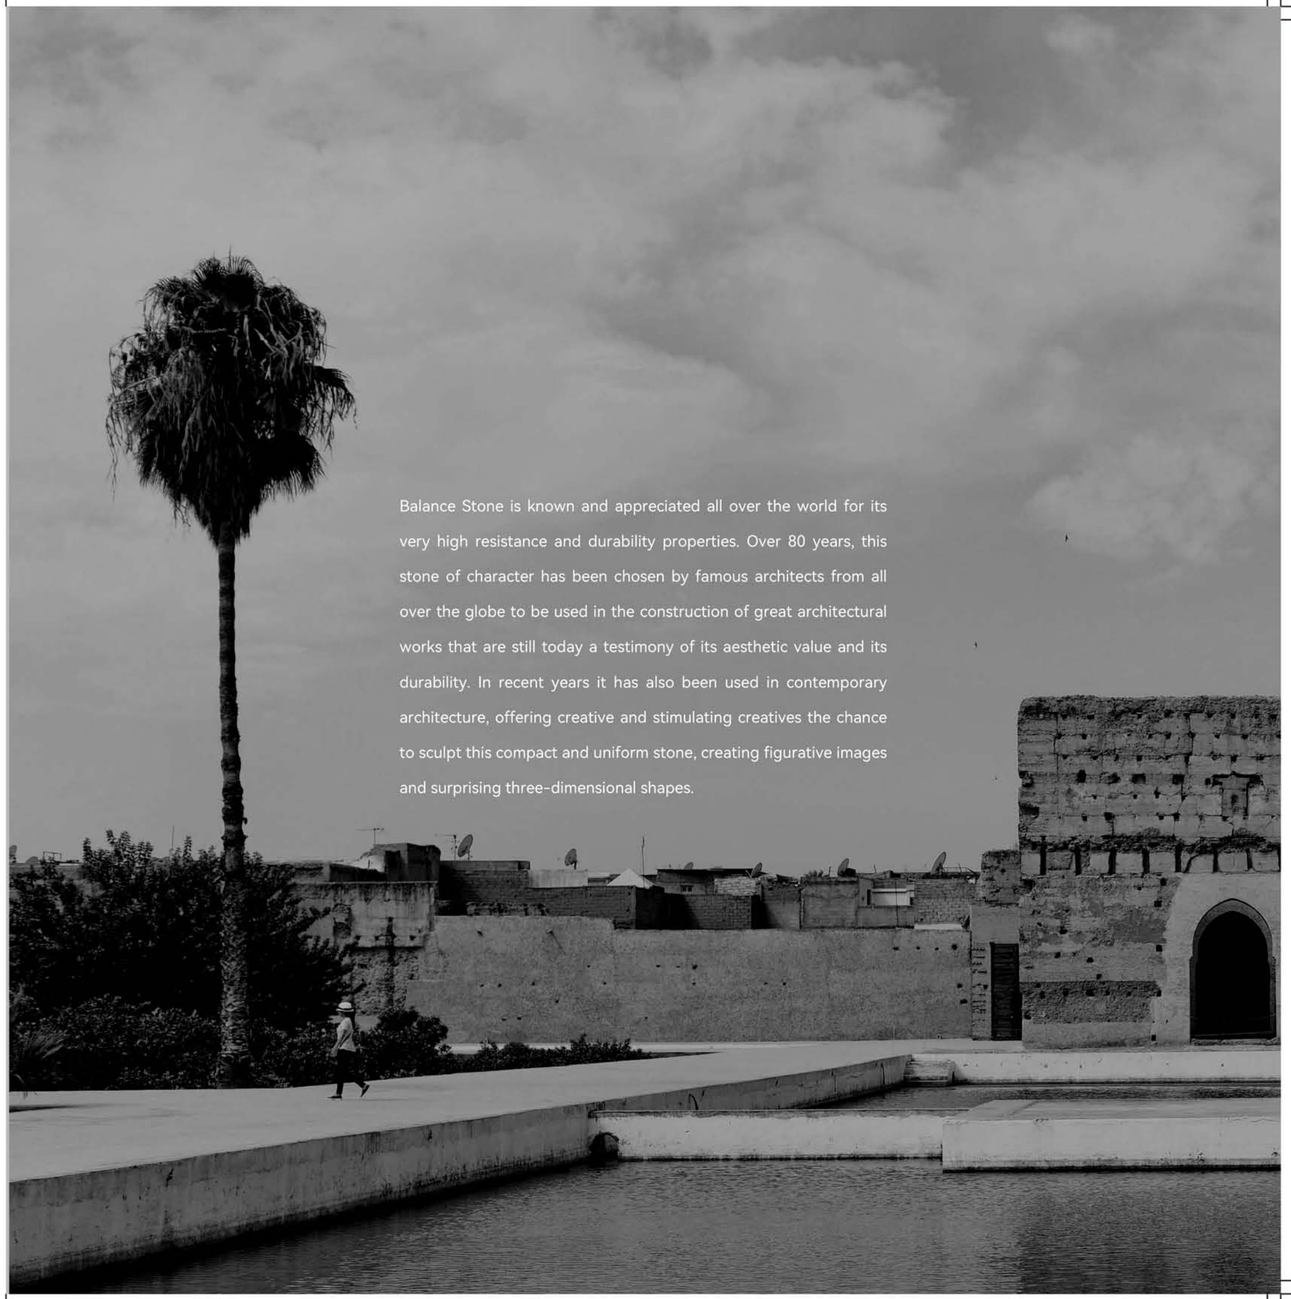

Balance Stone is known and appreciated all over the world for its very high resistance and durability properties. Over 80 years, this stone of character has been chosen by famous architects from all over the globe to be used in the construction of great architectural works that are still today a testimony of its aesthetic value and its durability. In recent years it has also been used in contemporary architecture, offering creative and stimulating creatives the chance to sculpt this compact and uniform stone, creating figurative images and surprising three-dimensional shapes.


WHITE

WHITE

NATURALE SURFACE



600X1200MM BS126J10



600X600MM BS66J10



FLOOR/ WHITE / 600X1200MM

WHITE

FLOOR
WHITE / 600X600MM




SAND

SAND

NATURALE SURFACE



600X1200MM BS126J12



600X600MM BS66J12



WALL/ FLOOR/ SAND / 600X1200MM

SAND

FLOOR
SAND / 600X600MM




GREY

GREY

NATURALE SURFACE



600X1200MM BS126J13



600X600MM BS66J13



FLOOR/ GREY / 600X1200MM

GREY

FLOOR

GREY / 600X600MM




ANTRACITE

ANTRACITE

NATURALE SURFACE



600X1200MM BS126J17



600X600MM BS66J17



FLOOR/ ANTRACITE/ 600X1200MM

ANTRACITE

FLOOR
ANTRACITE / 600X600MM



TECHNICAL CHARACTERISTICS

TECHNICAL CHARACTERISTICS		TEST METHOD	REQUIRED VALUE	DAUGRES VALUE [Average]
Length and Width	DIMENSIONS	GB/T 3810.2 ISO 10545.2	± 0.6%	± 0.2%
Thickness			± 5%	± 3%
Straightness of sides			± 0.5%	± 0.2%
Rectangularity			± 0.5%	± 0.2%
Surface flatness			±2.0MM Maximum	±0.5MM
Water Absorption		GB/T 3810.3 ISO 10545.3	Average maximum ≤0.5%	≤0.3%
Breaking Strength		GB/T 3810.4 ISO 10545.4	When the thickness ≥7.5mm,the mean value shall not be less than 1300N	Conformed
Modulus of Rupture		GB/T 3810.4 ISO 10545.4	Average maximum ≥35MPa	≥38MPa
Stain Resistance		GB/T 3810.14 ISO 10545.14	Minimum Class 3	Class 5
Chemicals Resistance		GB/T 3810.13 ISO 10545.13	Minimum GB	GA
Static coefficient of friction		GB/T 4100-2015(Annex M)	Individual ≥0.50	≥0.60
Crazing resistance		GB/T 3810.11 ISO 10545.11	No crazing or peeling on the glazed surface after the crazing test	Conformed
Slip Resistance		DIN 51130: 2014	Declared Value	R10