CERAMICA DAUGRES ITALIA S.R.L.
Fiorano Modenese (mo)via Pedemontana 100 Cap 41042 Italy

DAUGRES(CHINA)
Block 7, NO.88 Zhongshan 6th Road, Torch Development Zone Big Data Center, Zhongshan, Guangdong,P.R.China.

REVERSO CEMENT

HIGH STYLE & ITALIAN DESIGN

The design of Daugres products is realized in Italy. Through creativity, technical skills and Italian culture, Daugres designs cutting-edge surfaces, always up with interior design trends.

The “Italian Design” brand distinguishes all the collections thought and designed in Italy to promote an innovative product, with unsurpassable aesthetic qualities, immune to fashion and time.








SIZE INDEX

REVERSO CEMENT

Contemporary **Collection**



	WHITE	GREIGE	GRIGIO	MOKA	ANTRACITE
750X1500 10mm	NAT LEV		NAT LEV	NAT LEV	NAT LEV
600X1200 10mm	NAT SAT	NAT SAT	NAT	NAT	NAT SAT
600X600 9.5mm	NAT SAT GP	NAT SAT GP	NAT	NAT SAT GP	NAT SAT GP
300X600 9.5mm	NAT SAT GP	NAT SAT GP	NAT	NAT SAT GP	NAT SAT GP
600X1200 20mm	GP		GP	GP	GP
300X1200 20mm	GP		GP	GP	GP
600X600 20mm	GP	GP	GP	GP	GP
300X600 20mm	GP	GP	GP	GP	GP

TECHNICAL CHARACTERISTIC

- WATER ABSORPTION
- STAIN RESISTANCE
- SURFACE ABRASION
- CHEMICALS RESISTANCE
- BREAKING STRENGTH

SURFACE

- **NAT** NATURALE
- **LEV** LEVIGATO
- **GP** GRIP
- **SAT** SATIN LAPPATO

PACKAGING

	Pcs/Box	M²/Box	Kg/Box	Boxes/PLT	M²/PLT	Kg/PLT
750X1500 10mm	2	2.25	46.50	43	96.75	2050.00
600X1200 10mm	2	1.44	33.50	44	63.36	1494.00
600X1200 10mm	2	1.44	33.50	28	40.32	958.00
600X600 9.5mm	4	1.44	31.50	32	46.08	1028.00
300X600 9.5mm	8	1.44	31.00	32	46.08	1012.00
600X1200 20mm	/	/	34.00	44	31.68	1536.00
300X1200 20mm	2	0.72	34.00	42	30.24	1468.00
600X600 20mm	2	0.72	34.00	32	23.04	1108.00
300X600 20mm	4	0.72	34.00	32	23.04	1108.00



Reverso Cement is a multifunctional cement, capable of expanding the range of possibilities for managing a space. The surface sees the reduction of the aesthetic features without losing the details. The minimalist style of this product does not impose itself as a choice of life, but becomes an accomplice of the architecture and the organizational needs of the user.


WHITE

WHITE

NAT **NATURALE** SURFACE
LEV **LEVIGATO** SURFACE
GP **GRIP** SURFACE
SAT **SATIN LAPPATO** SURFACE

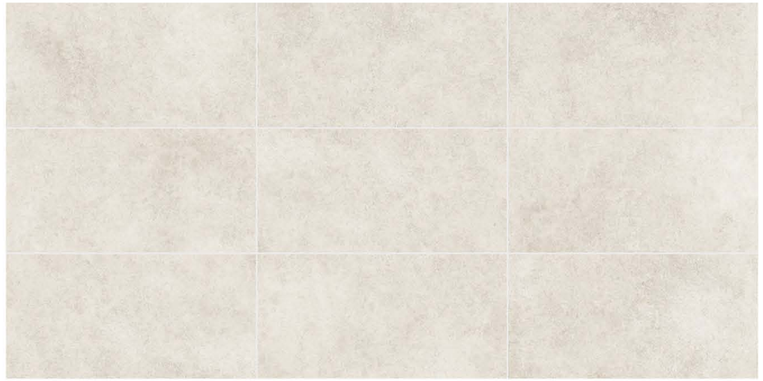

750X1500MM	BS157R10	BS157R10LEV	**600X1200X20MM**	BS126R10HGP	
600X1200MM	BS126R10	BS126R10SAT	**300X1200X20MM**	BS123R10HGP	



600X600MM	BS66R10	BS66R10SAT	BS66R10GP	**600X600X20MM**	BS66R10HGP	
300X600MM	BS36R10	BS36R10SAT	BS36R10GP	**300X600X20MM**	BS36R10HGP	



WALL/ WHITE / 600X1200MM

WHITE

FLOOR
WHITE / 600X1200MM



WHITE

FLOOR

WHITE / 600X600X20MM




GREIGE

GREIGE

NAT **NATURALE** SURFACE
GP **GRIP** SURFACE
SAT **SATIN LAPPATO** SURFACE



600X1200MM BS126R11 BS126R11SAT



600X600MM BS66R11 BS66R11SAT BS66R11GP
300X600MM BS36R11 BS36R11SAT BS36R11GP

600X600X20MM BS66R11HGP
300X600X20MM BS36R11HGP



WALL & FLOOR/ GREIGE / 600X1200MM

GREIGE

FLOOR

GREIGE / 600X1200MM




GRIGIO

GRIGIO

NAT **NATURALE** SURFACE
LEV **LEVIGATO** SURFACE
GP **GRIP** SURFACE



750X1500MM BS157R13 BS157R13LEV
600X1200MM BS126R13
600X1200X20MM BS126R13HGP
300X1200X20MM BS123R13HGP



600X600MM BS66R13
300X600MM BS36R13
600X600X20MM BS66R13HGP
300X600X20MM BS36R13HGP



FLOOR/ GRIGIO / 600X1200MM

GRIGIO

FLOOR

GRIGIO / 750X1500MM




MOKA

MOKA

NAT **NATURALE** SURFACE
LEV **LEVIGATO** SURFACE
GP **GRIP** SURFACE
SAT **SATIN LAPPATO** SURFACE



750X1500MM BS157R15 BS157R15LEV
600X1200MM BS126R15
600X1200X20MM BS126R15HGP
300X1200X20MM BS123R15HGP



600X600MM BS66R15 BS66R15SAT BS66R15GP
300X600MM BS36R15 BS36R15SAT BS36R15GP
600X600X20MM BS66R15HGP
300X600X20MM BS36R15HGP



FLOOR/MOKA / 600X1200MM

MOKA

FLOOR

MOKA / 600X1200MM




ANTRACITE

ANTRACITE

NAT **NATURALE** SURFACE
LEV **LEVIGATO** SURFACE
GP **GRIP** SURFACE
SAT **SATIN LAPPATO** SURFACE



750X1500MM BS157R17 BS157R17LEV
600X1200MM BS126R17 BS126R17SAT
600X1200X20MM BS126R17HGP
300X1200X20MM BS123R17HGP



600X600MM BS66R17 BS66R17SAT BS66R17GP
300X600MM BS36R17 BS36R17SAT BS36R17GP
600X600X20MM BS66R17HGP
300X600X20MM BS36R17HGP



FLOOR/ ANTRACITE / 600X1200MM

ANTRACITE

FLOOR
ANTRACITE / 750X1500MM



TECHNICAL CHARACTERISTICS

TECHNICAL CHARACTERISTICS		TEST METHOD	REQUIRED VALUE	DAUGRES VALUE [Average]
Length and Width	DIMENSIONS	GB/T 3810.2 ISO 10545.2	± 0.6%	± 0.2%
Thickness			± 5%	± 3%
Straightness of sides			± 0.5%	± 0.2%
Rectangularity			± 0.5%	± 0.2%
Surface flatness			±2.0MM Maximum	±0.5MM
Water Absorption		GB/T 3810.3 ISO 10545.3	Average maximum ≤0.5%	≤0.3%
Breaking Strength		GB/T 3810.4 ISO 10545.4	When the thickness ≥7.5mm,the mean value shall not be less than 1300N	Conformed
Modulus of Rupture		GB/T 3810.4 ISO 10545.4	Average maximum ≥35MPa	≥38MPa
Stain Resistance		GB/T 3810.14 ISO 10545.14	Minimum Class 3	Class 5
Chemicals Resistance		GB/T 3810.13 ISO 10545.13	Minimum GB	GA
Static coefficient of friction		GB/T 4100-2015(Annex M)	Individual ≥0.50	≥0.60
Crazing resistance		GB/T 3810.11 ISO 10545.11	No crazing or peeling on the glazed surface after the crazing test	Conformed
Slip Resistance		DIN 51130: 2014	Declared Value	Naturale R10 / Grip R11

Uniform Appearance V1	Slight Variation V2	Moderate Variation V3	Substantial Variation V4