CERAMICA DAUGRES ITALIA S.R.L.
Fiorano Modenese (mo)via Pedemontana 100 Cap 41042 Italy

DAUGRES(CHINA)
Block 7, NO.88 Zhongshan 6th Road, Torch Development Zone Big Data Center, Zhongshan, Guangdong,P.R.China.


STAYSTONE

DAUGRES
Italian Design

HIGH STYLE & ITALIAN DESIGN

The design of Daugres products is realized in Italy. Through creativity, technical skills and Italian culture, Daugres designs cutting-edge surfaces, always up with interior design trends.

The “Italian Design” brand distinguishes all the collections thought and designed in Italy to promote an innovative product, with unsurpassable aesthetic qualities, immune to fashion and time.





SIZE INDEX

STAYSTONE

Stone **Collection**



	ICE	CREAM	GREY	BROWN	DARK
750X1500 薄9mm		NAT	NAT	NAT	
600X1200 薄10mm	NAT	NAT	NAT	NAT	NAT
600X600 薄9.5mm	NAT	NAT	NAT	NAT	NAT
300X600 薄9.5mm	NAT	NAT	NAT	NAT	NAT

TECHNICAL CHARACTERISTIC

- WATER ABSORPTION
- STAIN RESISTANCE
- SURFACE ABRASION
- CHEMICALS RESISTANCE
- BREAKING STRENGTH

SURFACE

NAT NATURALE

PACKAGING

	Pcs/Box	M²/Box	Kg/Box	Boxes/PLT	M²/PLT	Kg/PLT
750X1500 薄9mm	2	2.25	46.50	43	96.75	2050.00
600X1200 薄10mm	2	1.44	33.50	44	63.36	1494.00
600X600 薄9.5mm	4	1.44	31.50	32	46.08	1028.00
300X600 薄9.5mm	8	1.44	31.00	32	46.08	1012.00




With Stay Stone we can talk about redesign, presenting a new way of interpreting the recovery stone.The project shows the characteristics of a marble, noble stone, transferring the vicissitudes of a recovery to the surface.At the same time, a radical graphic cleaning operation makes the product placeable in a contemporary and urban environment.In the project the traces of a dynamic past remain, capable of giving comfort and energy to the spaces.

ICE

ICE

NAT **NATURALE** SURFACE

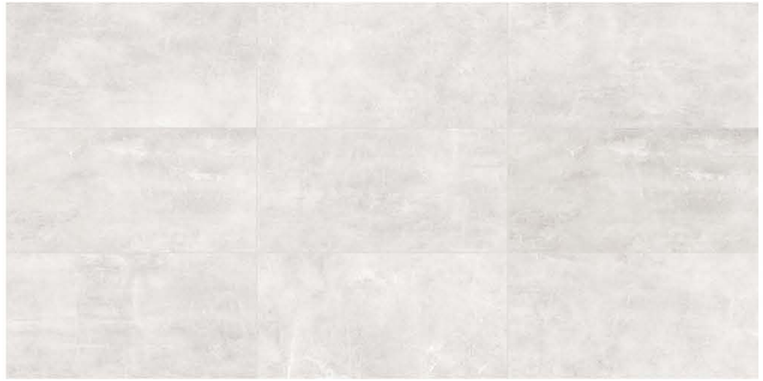

600X1200MM BS126S10

600X600MM BS66S10 **300X600MM** BS36S10



FLOOR/ ICE / 600X600MM

ICE

FLOOR

ICE/ 600X1200MM




CREAM

CREAM

NATURALE SURFACE

750X1500MM BS157S12 **600X1200MM** BS126S12

600X600MM BS66S12 **300X600MM** BS36S12



FLOOR/ CREAM / 600X1200MM

CREAM

FLOOR

CREAM/ 750X1500MM




GREY

GREY

NATURALE SURFACE



750X1500MM BS157S13 **600X1200MM** BS126S13



600X600MM BS66S13 **300X600MM** BS36S13



FLOOR/ GREY/ 750X1500MM

GREY

FLOOR


GREY / 600X1200MM





BROWN

BROWN

NAT **NATURALE** SURFACE

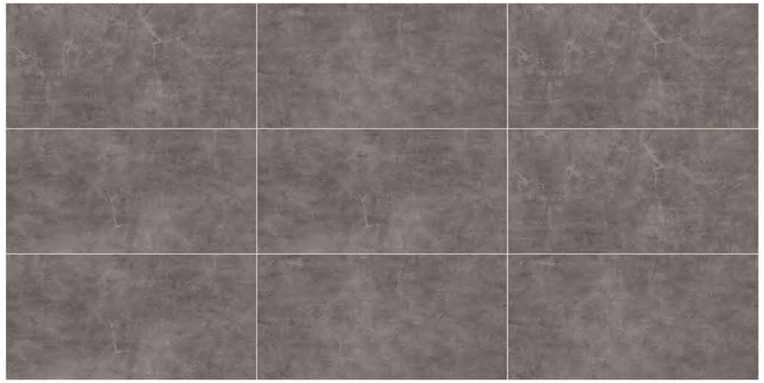

750X1500MM BS157S16 **600X1200MM** BS126S16

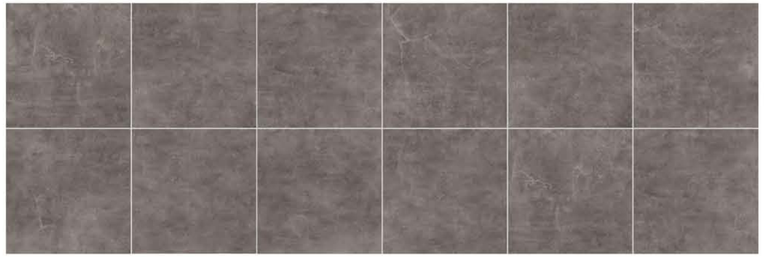

600X600MM BS66S16 **300X600MM** BS36S16



FLOOR / BROWN / 600X1200MM

BROWN

FLOOR

BROWN / 600X1200MM




DARK

DARK

NATURALE SURFACE



600X1200MM BS126S17



600X600MM BS66S17

300X600MM BS36S17



FLOOR / DARK / 600X600MM

DARK

FLOOR&WALL

DARK / 600X1200MM



TECHNICAL CHARACTERISTICS

TECHNICAL CHARACTERISTICS		TEST METHOD	REQUIRED VALUE	DAUGRES VALUE [Average]
Length and Width	DIMENSIONS	GB/T 3810.2 ISO 10545.2	± 0.6%	± 0.2%
Thickness			± 5%	± 3%
Straightness of sides			± 0.5%	± 0.2%
Rectangularity			± 0.5%	± 0.2%
Surface flatness			±2.0MM Maximum	±0.5MM
Water Absorption		GB/T 3810.3 ISO 10545.3	Average maximum ≤0.5%	≤0.3%
Breaking Strength		GB/T 3810.4 ISO 10545.4	When the thickness ≥7.5mm,the mean value shall not be less than 1300N	Conformed
Modulus of Rupture		GB/T 3810.4 ISO 10545.4	Average maximum ≥35MPa	≥38MPa
Stain Resistance		GB/T 3810.14 ISO 10545.14	Minimum Class 3	Class 5
Chemicals Resistance		GB/T 3810.13 ISO 10545.13	Minimum GB	GA
Static coefficient of friction		GB/T 4100-2015(Annex M)	Individual ≥0.50	≥0.60
Crazing resistance		GB/T 3810.11 ISO 10545.11	No crazing or peeling on the glazed surface after the crazing test	Conformed
Slip Resistance		DIN 51130: 2014	Declared Value	Naturale R10

