CERAMICA DAUGRES ITALIA S.R.L.
Fiorano Modenese (mo)via Pedemontana 100 Cap 41042 Italy

DAUGRES(CHINA)
Block 7, NO.88 Zhongshan 6th Road, Torch Development Zone Big Data Center, Zhongshan, Guangdong,P.R.China.

SUNSTONE

DAUGRES
Italian Design

HIGH STYLE & ITALIAN DESIGN

The design of Daugres products is realized in Italy. Through creativity, technical skills and Italian culture, Daugres designs cutting-edge surfaces, always up with interior design trends.

The “Italian Design” brand distinguishes all the collections thought and designed in Italy to promote an innovative product, with unsurpassable aesthetic qualities, immune to fashion and time.









SIZE INDEX

SUNSTONE

Stone **Collection**

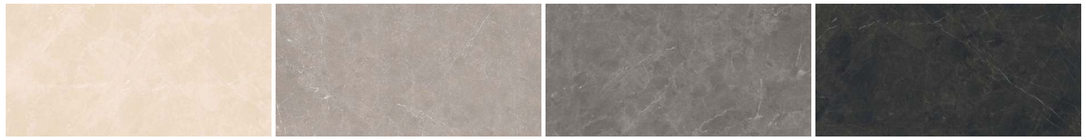

BEIGE | GREIGE | GRIGIO | NERO

	BEIGE	GREIGE	GRIGIO	NERO
750X1500 耳10mm		SMO	SMO	
600X1200 耳10mm	SL	SL	SL	SL
600X600 耳9.5mm	NAT LEV	NAT LEV	NAT LEV	NAT LEV
300X600 耳9.5mm	NAT LEV	NAT LEV	NAT LEV	NAT LEV

TECHNICAL CHARACTERISTIC


- WATER ABSORPTION
- STAIN RESISTANCE
- SURFACE ABRASION
- CHEMICALS RESISTANCE
- BREAKING STRENGTH

SURFACE

- NAT NATURALE
- LEV LEVIGATO
- SL SILK
- SMO SMOOTH

PACKAGING

	Pcs/Box	M²/Box	Kg/Box	Boxes/PLT	M²/PLT	Kg/PLT
750X1500 耳10mm	2	2.25	51.00	40	90.00	2090.00
750X1500 耳10mm	2	2.25	51.00	26	58.50	1376.00
600X1200 耳10mm	2	1.44	33.50	44	63.36	1494.00
600X1200 耳10mm	2	1.44	33.50	28	40.32	958.00
600X600 耳9.5mm	4	1.44	31.50	32	46.08	1028.00
300X600 耳9.5mm	5	0.90	19.50	52	46.08	1034.00
300X600 耳9.5mm	8	1.44	31.00	32	46.08	1012.00

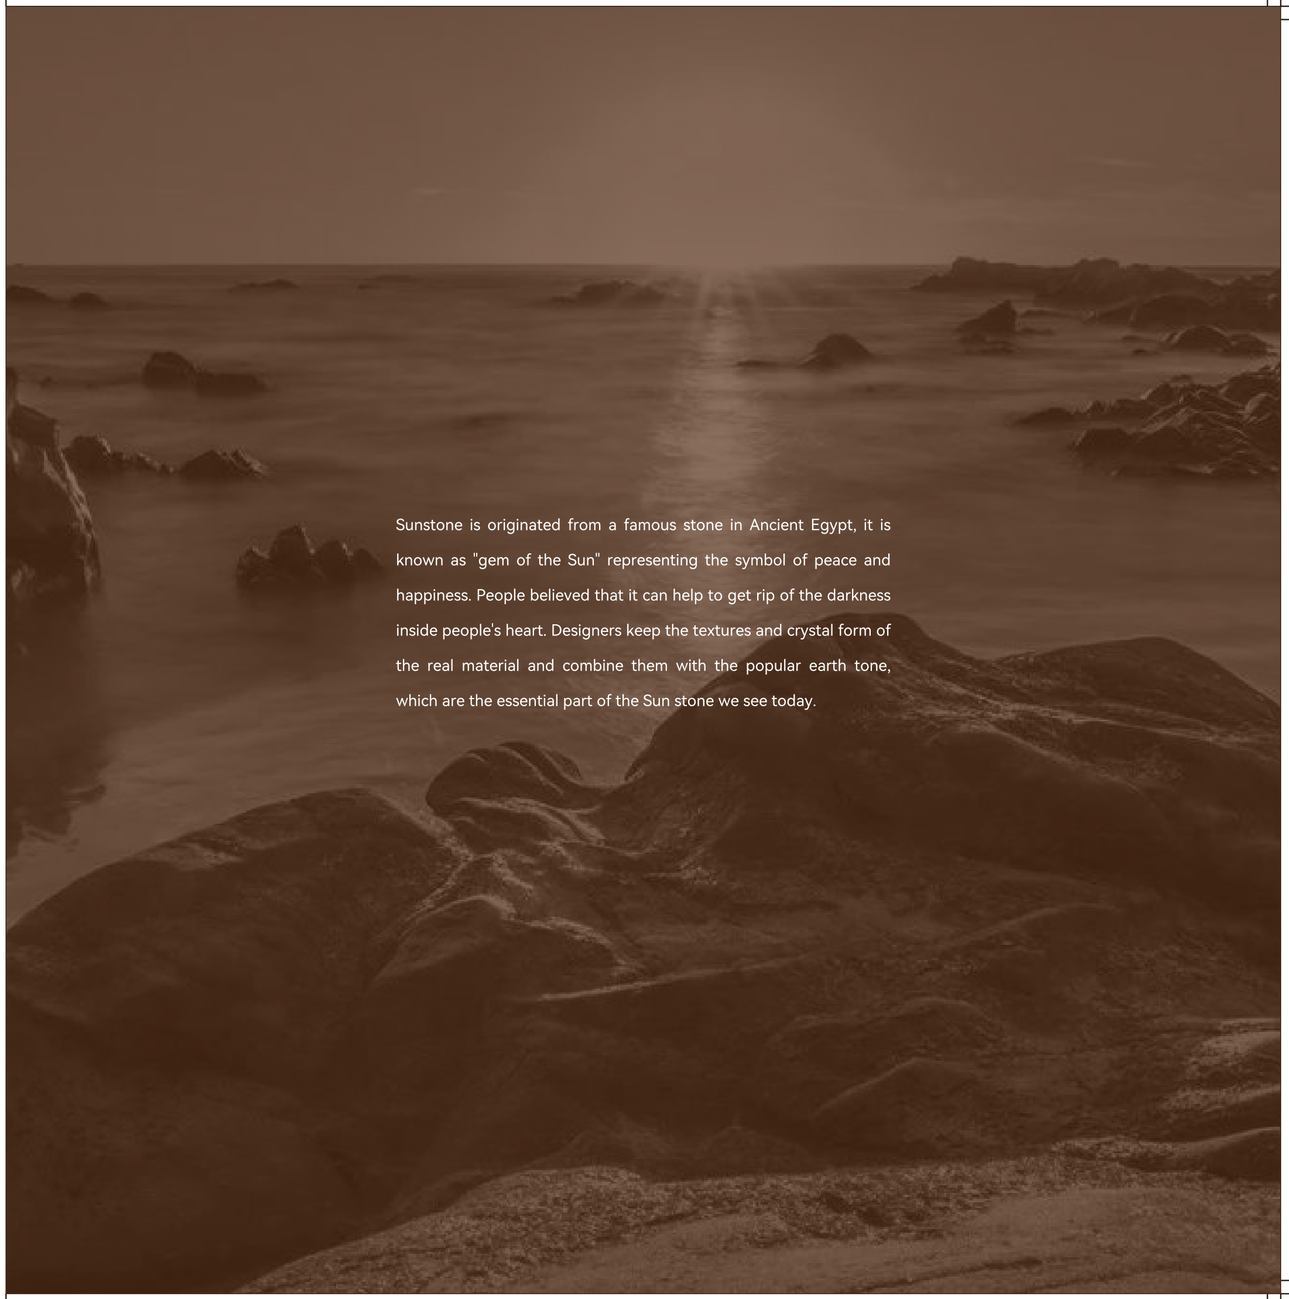

Sunstone is originated from a famous stone in Ancient Egypt, it is known as "gem of the Sun" representing the symbol of peace and happiness. People believed that it can help to get rip of the darkness inside people's heart. Designers keep the textures and crystal form of the real material and combine them with the popular earth tone, which are the essential part of the Sun stone we see today.


BEIGE

BEIGE

NAT **NATURALE** LEV **LEVIGATO** SL **SILK** SURFACE

600X1200MM BM126122SL

600X600MM BM66122LAP
BM66122

300X600MM BM36122LAP
BM36122



WALL/ BEIGE / 600X1200MM

BEIGE

FLOOR

BEIGE/ 600X1200MM





GREIGE

GREIGE

NAT **NATURALE** LEV **LEVIGATO** SL **SILK** SMO **SMOOTH** SURFACE



750X1500MM BM1575123SMO **600X1200MM** BM126123SL

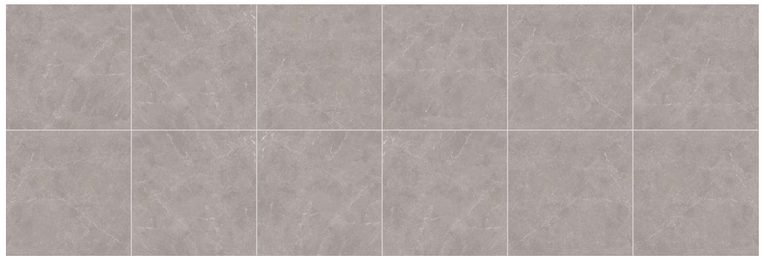

600X600MM BM66123LAP
BM66123

300X600MM BM36123LAP
BM36123

FLOOR/ GREIGE / 600X1200MM

GREIGE

FLOOR

GREIGE/ 600X600MM




GRIGIO

GRIGIO

NAT **NATURALE** LEV **LEVIGATO** SL **SILK** SMO **SMOOTH** SURFACE



750X1500MM BM1575125SMO **600X1200MM** BM126125SL



600X600MM BM66125LAP
BM66125

300X600MM BM36125LAP
BM36125



FLOOR/ GRIGIO/ 750X1500MM

GRIGIO


FLOOR

GRIGIO / 600X1200MM

WALL

GRIGIO / 600X1200MM

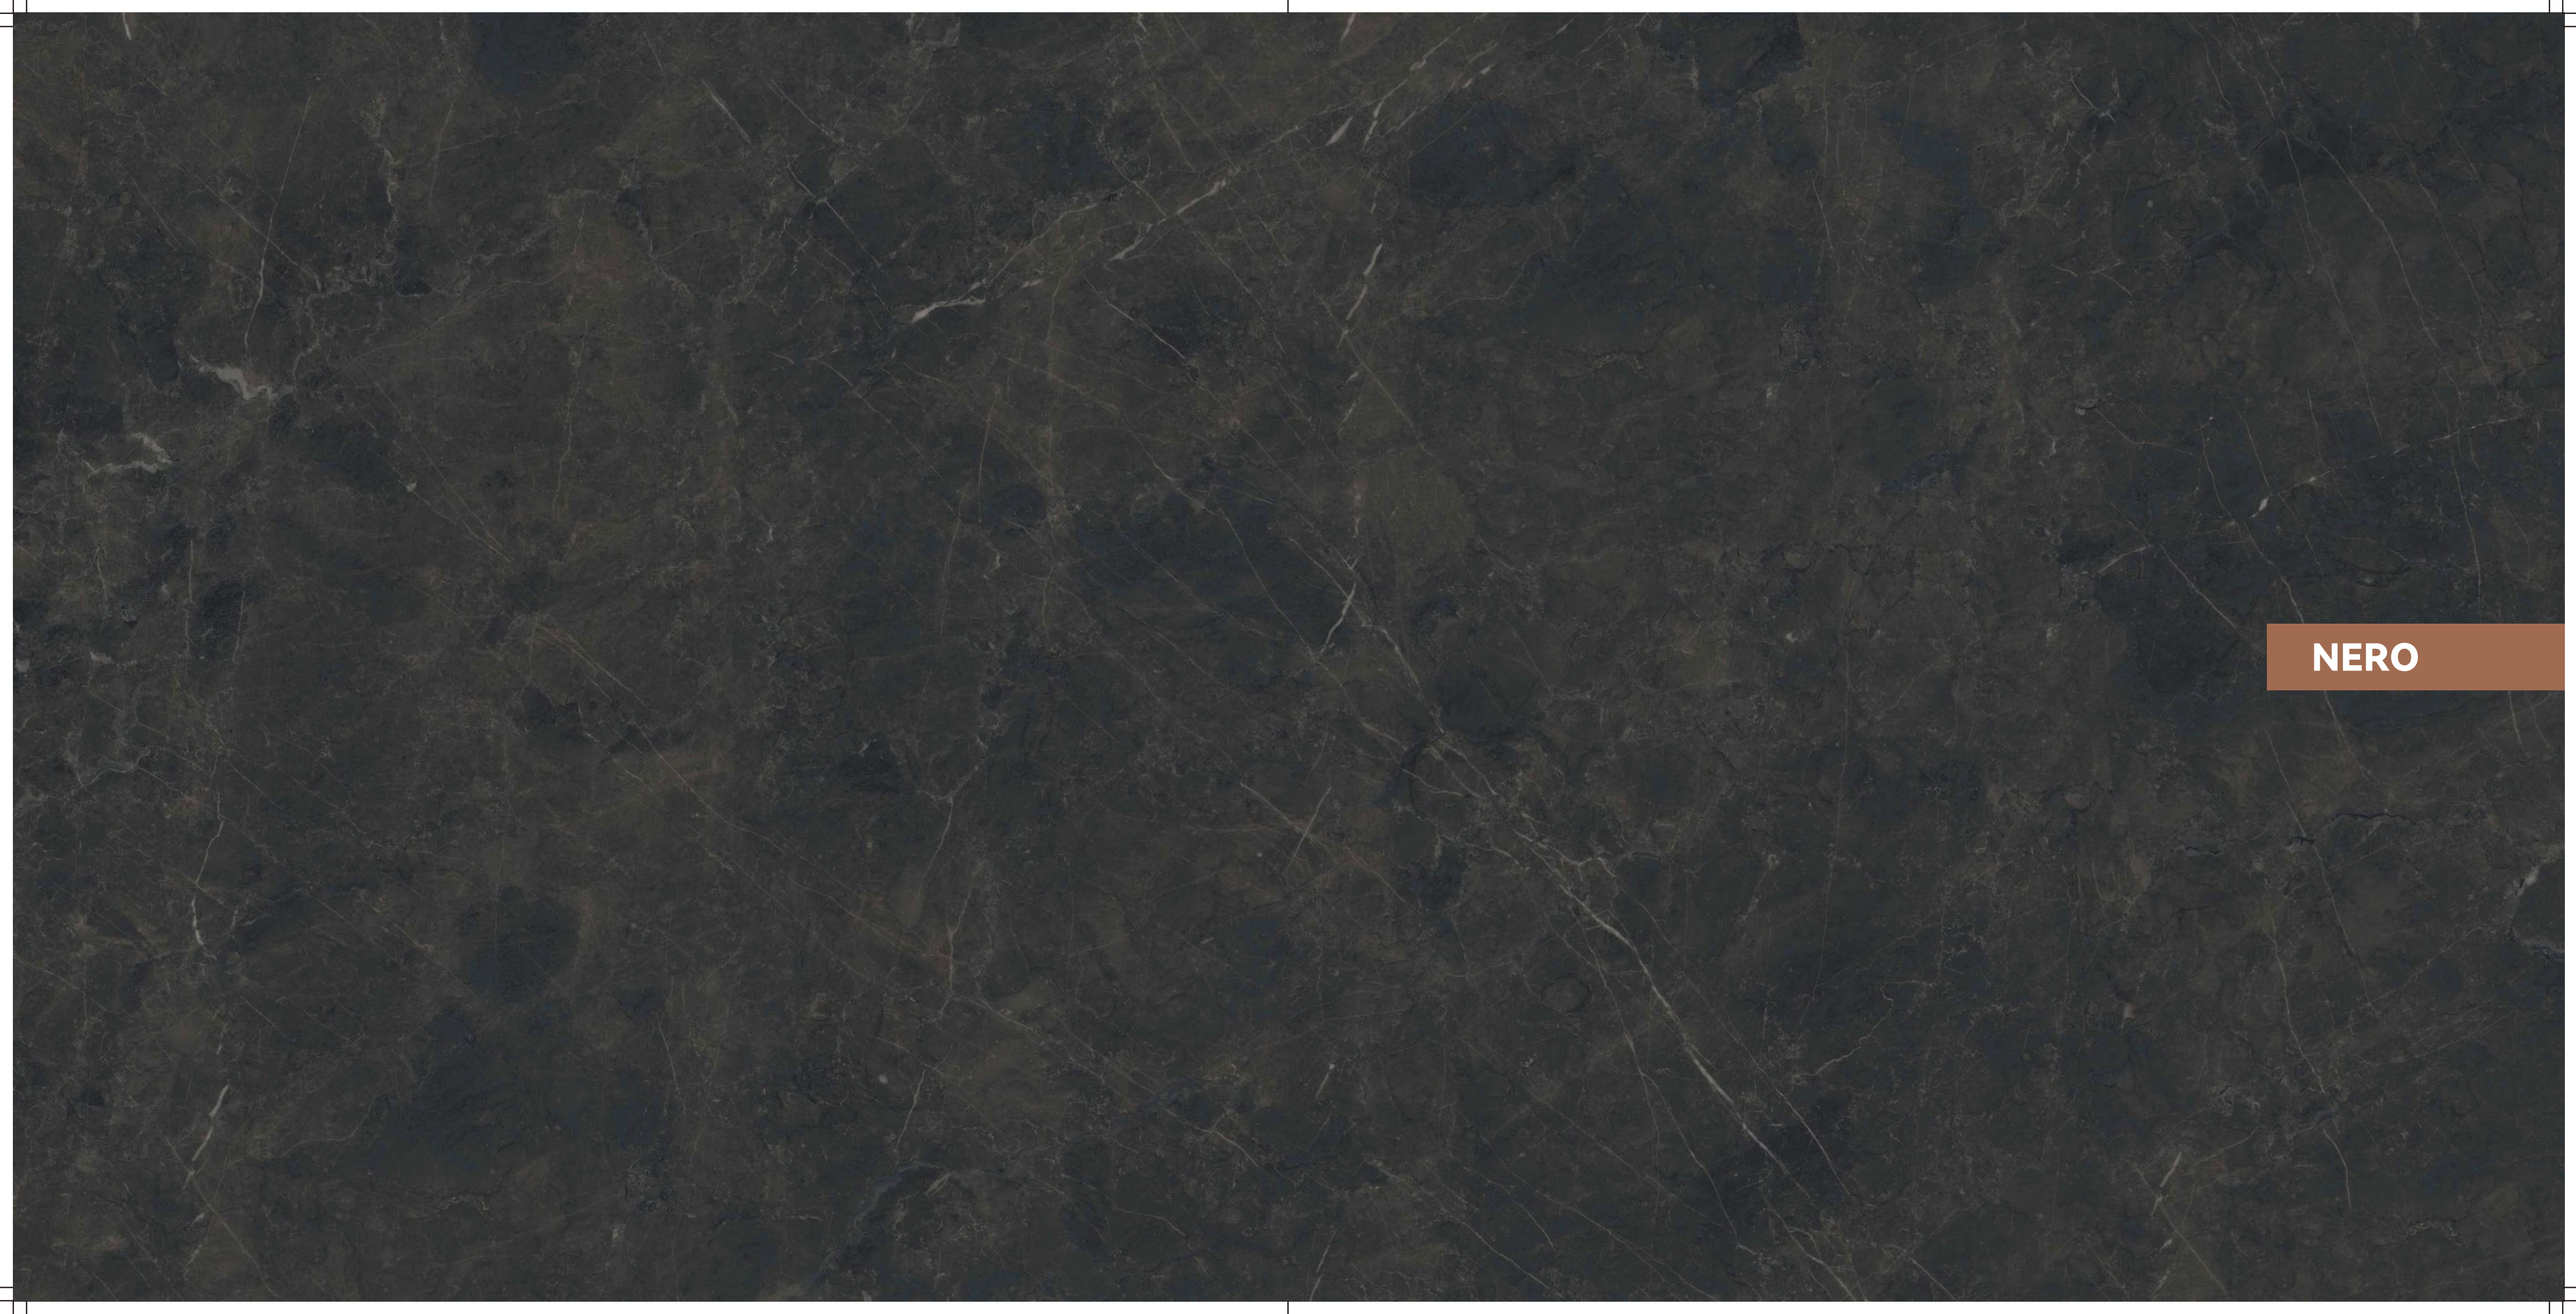


NERO

NERO

NAT **NATURALE** LEV **LEVIGATO** SL **SILK** SURFACE



600X1200MM BM126127SL



600X600MM BM66127LAP
BM66127

300X600MM BM36127LAP
BM36127



FLOOR / NERO / 600X1200MM

NERO

FLOOR

NERO / 600X1200MM



TECHNICAL CHARACTERISTICS

TECHNICAL CHARACTERISTICS		TEST METHOD	REQUIRED VALUE	DAUGRES VALUE [Average]
Length and Width	DIMENSIONS	GB/T 3810.2 ISO 10545.2	± 0.6%	± 0.2%
Thickness			± 5%	± 3%
Straightness of sides			± 0.5%	± 0.2%
Rectangularity			± 0.5%	± 0.2%
Surface flatness			±2.0MM Maximum	±0.5MM
Water Absorption		GB/T 3810.3 ISO 10545.3	Average maximum ≤0.5%	≤0.3%
Breaking Strength		GB/T 3810.4 ISO 10545.4	When the thickness ≥7.5mm,the mean value shall not be less than 1300N	Conformed
Modulus of Rupture		GB/T 3810.4 ISO 10545.4	Average maximum ≥35MPa	≥38MPa
Stain Resistance		GB/T 3810.14 ISO 10545.14	Minimum Class 3	Class 5
Chemicals Resistance		GB/T 3810.13 ISO 10545.13	Minimum GB	GA
Static coefficient of friction		GB/T 4100-2015(Annex M)	Individual ≥0.50	≥0.60
Crazing resistance		GB/T 3810.11 ISO 10545.11	No crazing or peeling on the glazed surface after the crazing test	Conformed
Slip Resistance		DIN 51130: 2014	Declared Value	R10

Uniform Appearance V1	Slight Variation V2	Moderate Variation V3	Substantial Variation V4