CERAMICA DAUGRES ITALIA S.R.L.
Fiorano Modenese (mo)via Pedemontana 100 Cap 41042 Italy

DAUGRES(CHINA)
Block 7, NO.88 Zhongshan 6th Road, Torch Development Zone Big Data Center, Zhongshan, Guangdong,P.R.China.


TIMELESS

DAUGRES
Italian Design

HIGH STYLE & ITALIAN DESIGN

The design of Daugres products is realized in Italy. Through creativity, technical skills and Italian culture, Daugres designs cutting-edge surfaces, always up with interior design trends.

The “Italian Design” brand distinguishes all the collections thought and designed in Italy to promote an innovative product, with unsurpassable aesthetic qualities, immune to fashion and time.





SIZE INDEX

TIMELESS

Contemporary **Collection**



	IVORY	LIGHT GREY	GREIGE	GREY	AMBRE	IRON
750X1500 ⊟9mm			NAT	NAT		
600X1200 ⊟10mm	NAT	NAT	NAT	NAT	NAT	NAT
600X600 ⊟9.5mm	NAT	NAT	NAT	NAT	NAT	NAT
300X600 ⊟9.5mm	NAT	NAT	NAT	NAT	NAT	NAT
600X600 ⊟20mm		GP	GP	GP		
300X600 ⊟20mm		GP	GP	GP		

TECHNICAL CHARACTERISTIC

WATER ABSORPTION

STAIN RESISTANCE

SURFACE ABRASION

CHEMICALS RESISTANCE

BREAKING STRENGTH

SURFACE

NAT NATURALE


GP GRIP

PACKAGING

	Pcs/Box	M²/Box	Kg/Box	Boxes/PLT	M²/PLT	Kg/PLT
750X1500 ⊟10mm	2	2.25	51.00	40	90.00	2090.00
750X1500 ⊟10mm	2	2.25	51.00	26	58.50	1376.00
600X1200 ⊟10mm	2	1.44	33.50	44	63.36	1494.00
600X1200 ⊟10mm	2	1.44	33.50	28	40.32	958.00
600X600 ⊟9.5mm	4	1.44	31.50	32	46.08	1028.00
300X600 ⊟9.5mm	8	1.44	31.00	32	46.08	1012.00
600X600 ⊟20mm	2	0.72	34.00	32	23.04	1108.00
300X600 ⊟20mm	4	0.72	34.00	32	23.04	1108.00



Timeless is a Daugres surface project that brings together the best of concrete and metal effects. A very rich color range designed to stage large ceramic slabs that give the sensation of seamless surfaces, which is ideal for all destinations that require architectural rigor and design freedom.

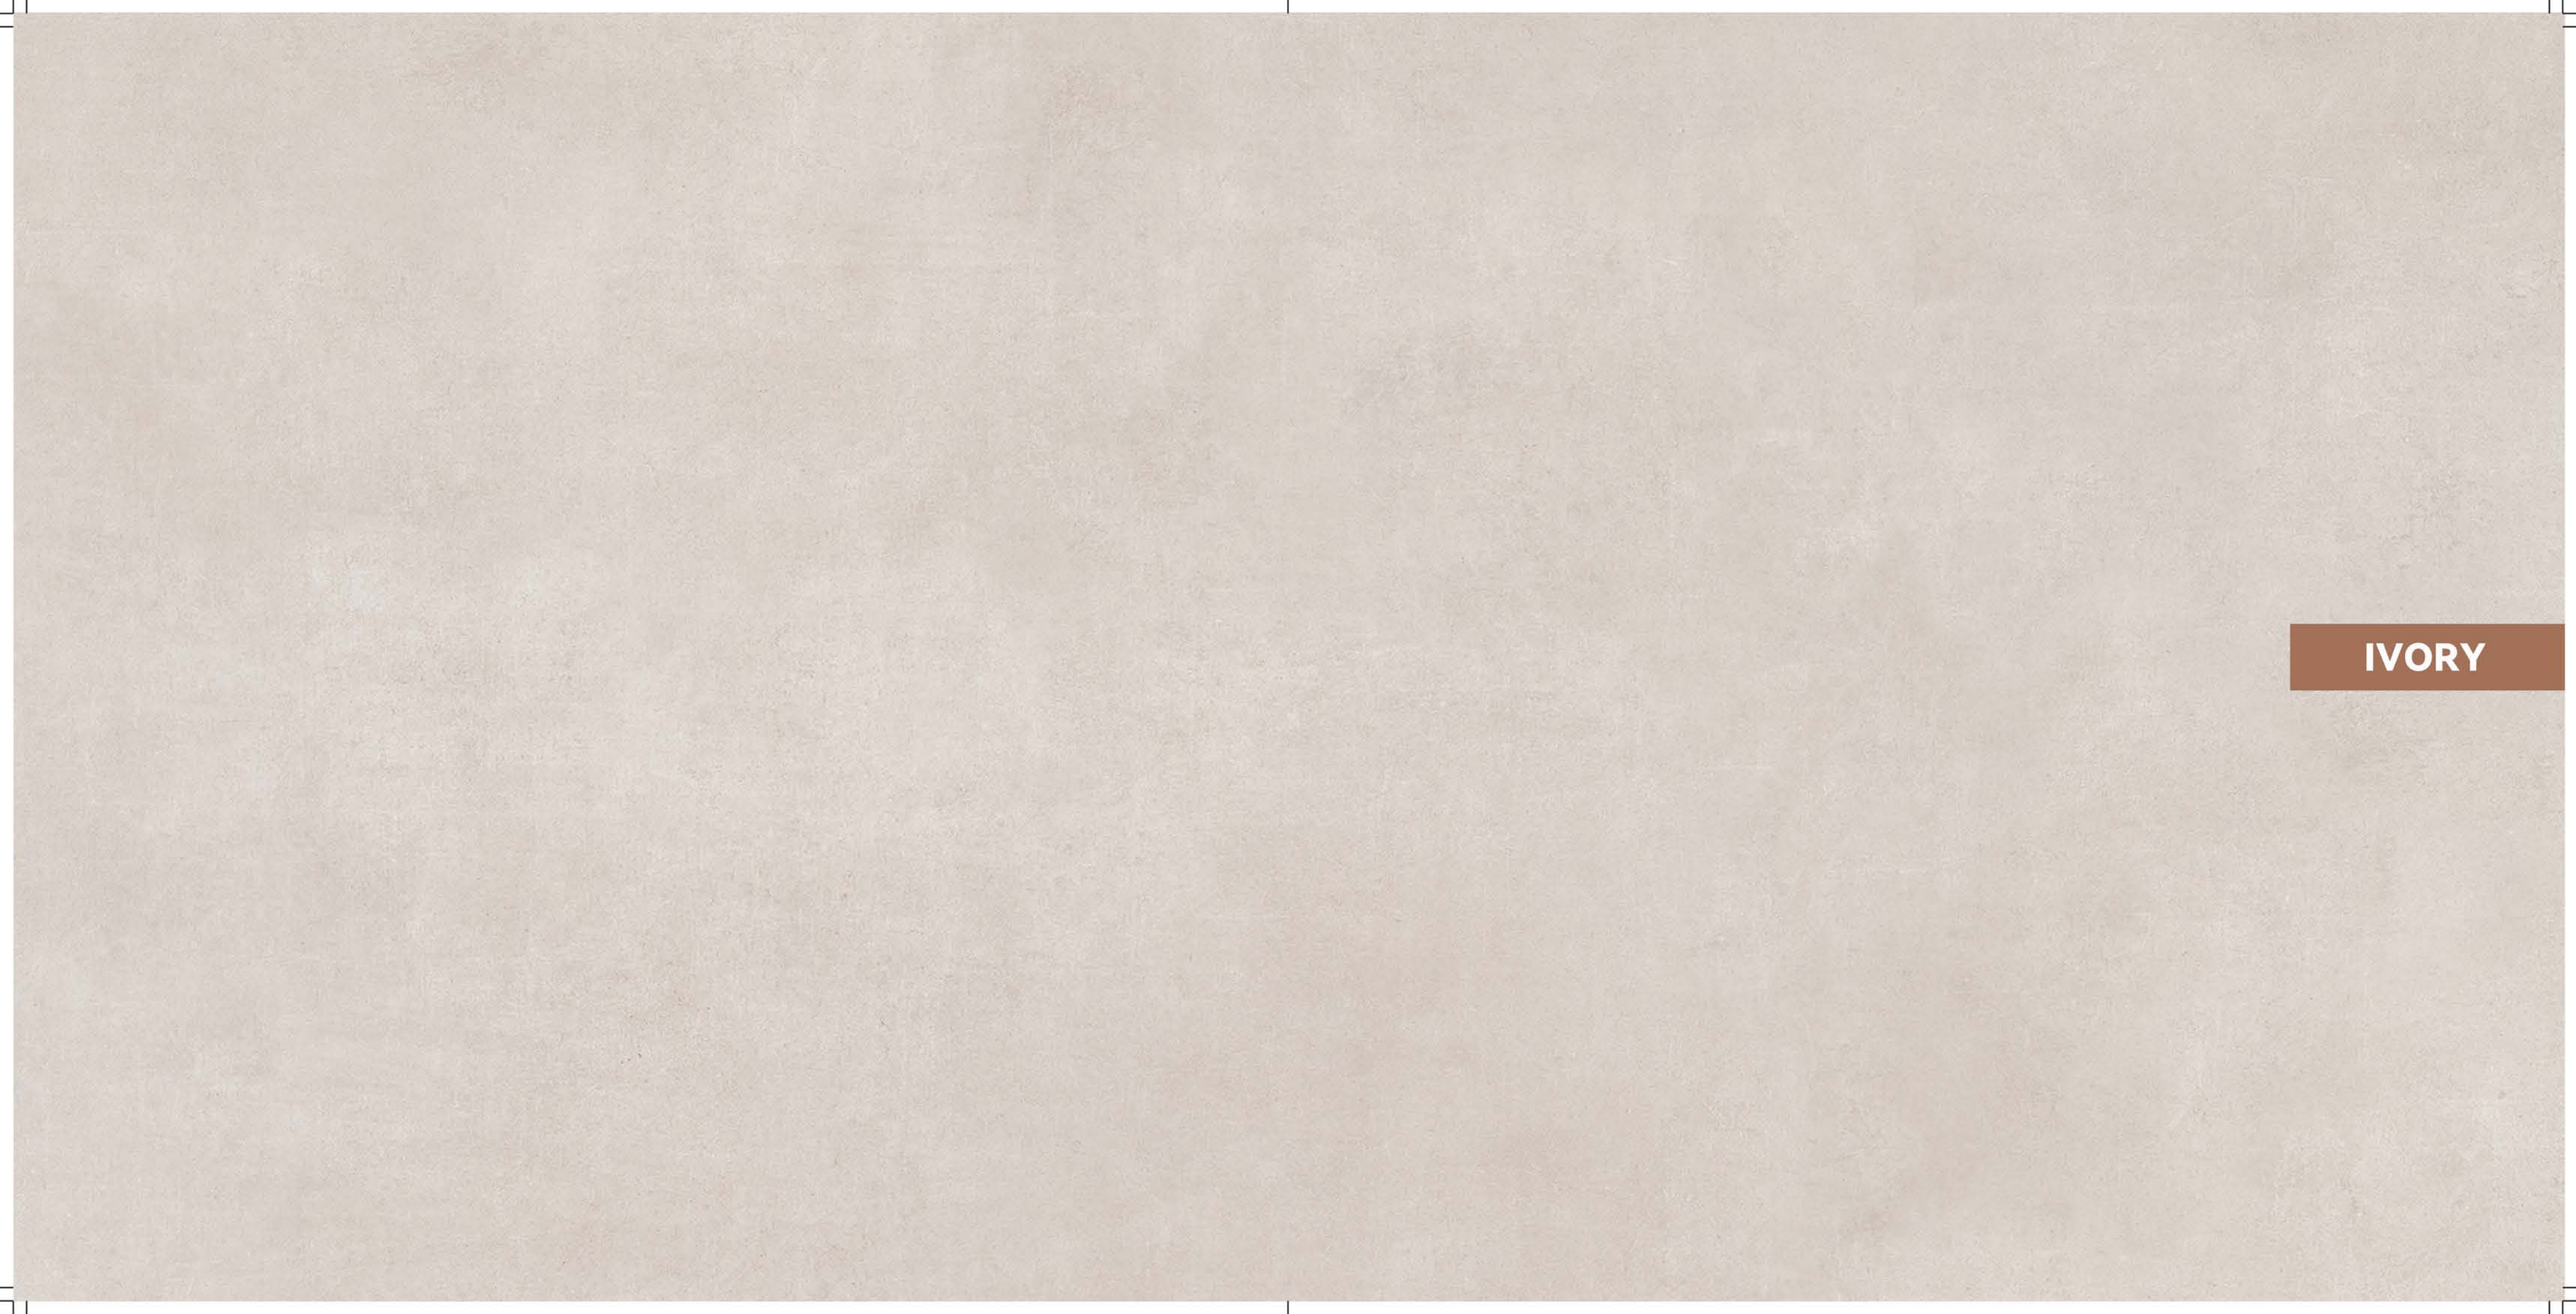
IVORY

IVORY

NATURALE SURFACE



600X1200MM BB126C80



600X600MM BB60C80 **300X600MM** BB36C80




FLOOR/ IVORY / 600X1200MM

IVORY

FLOOR


IVORY/ 600X1200MM

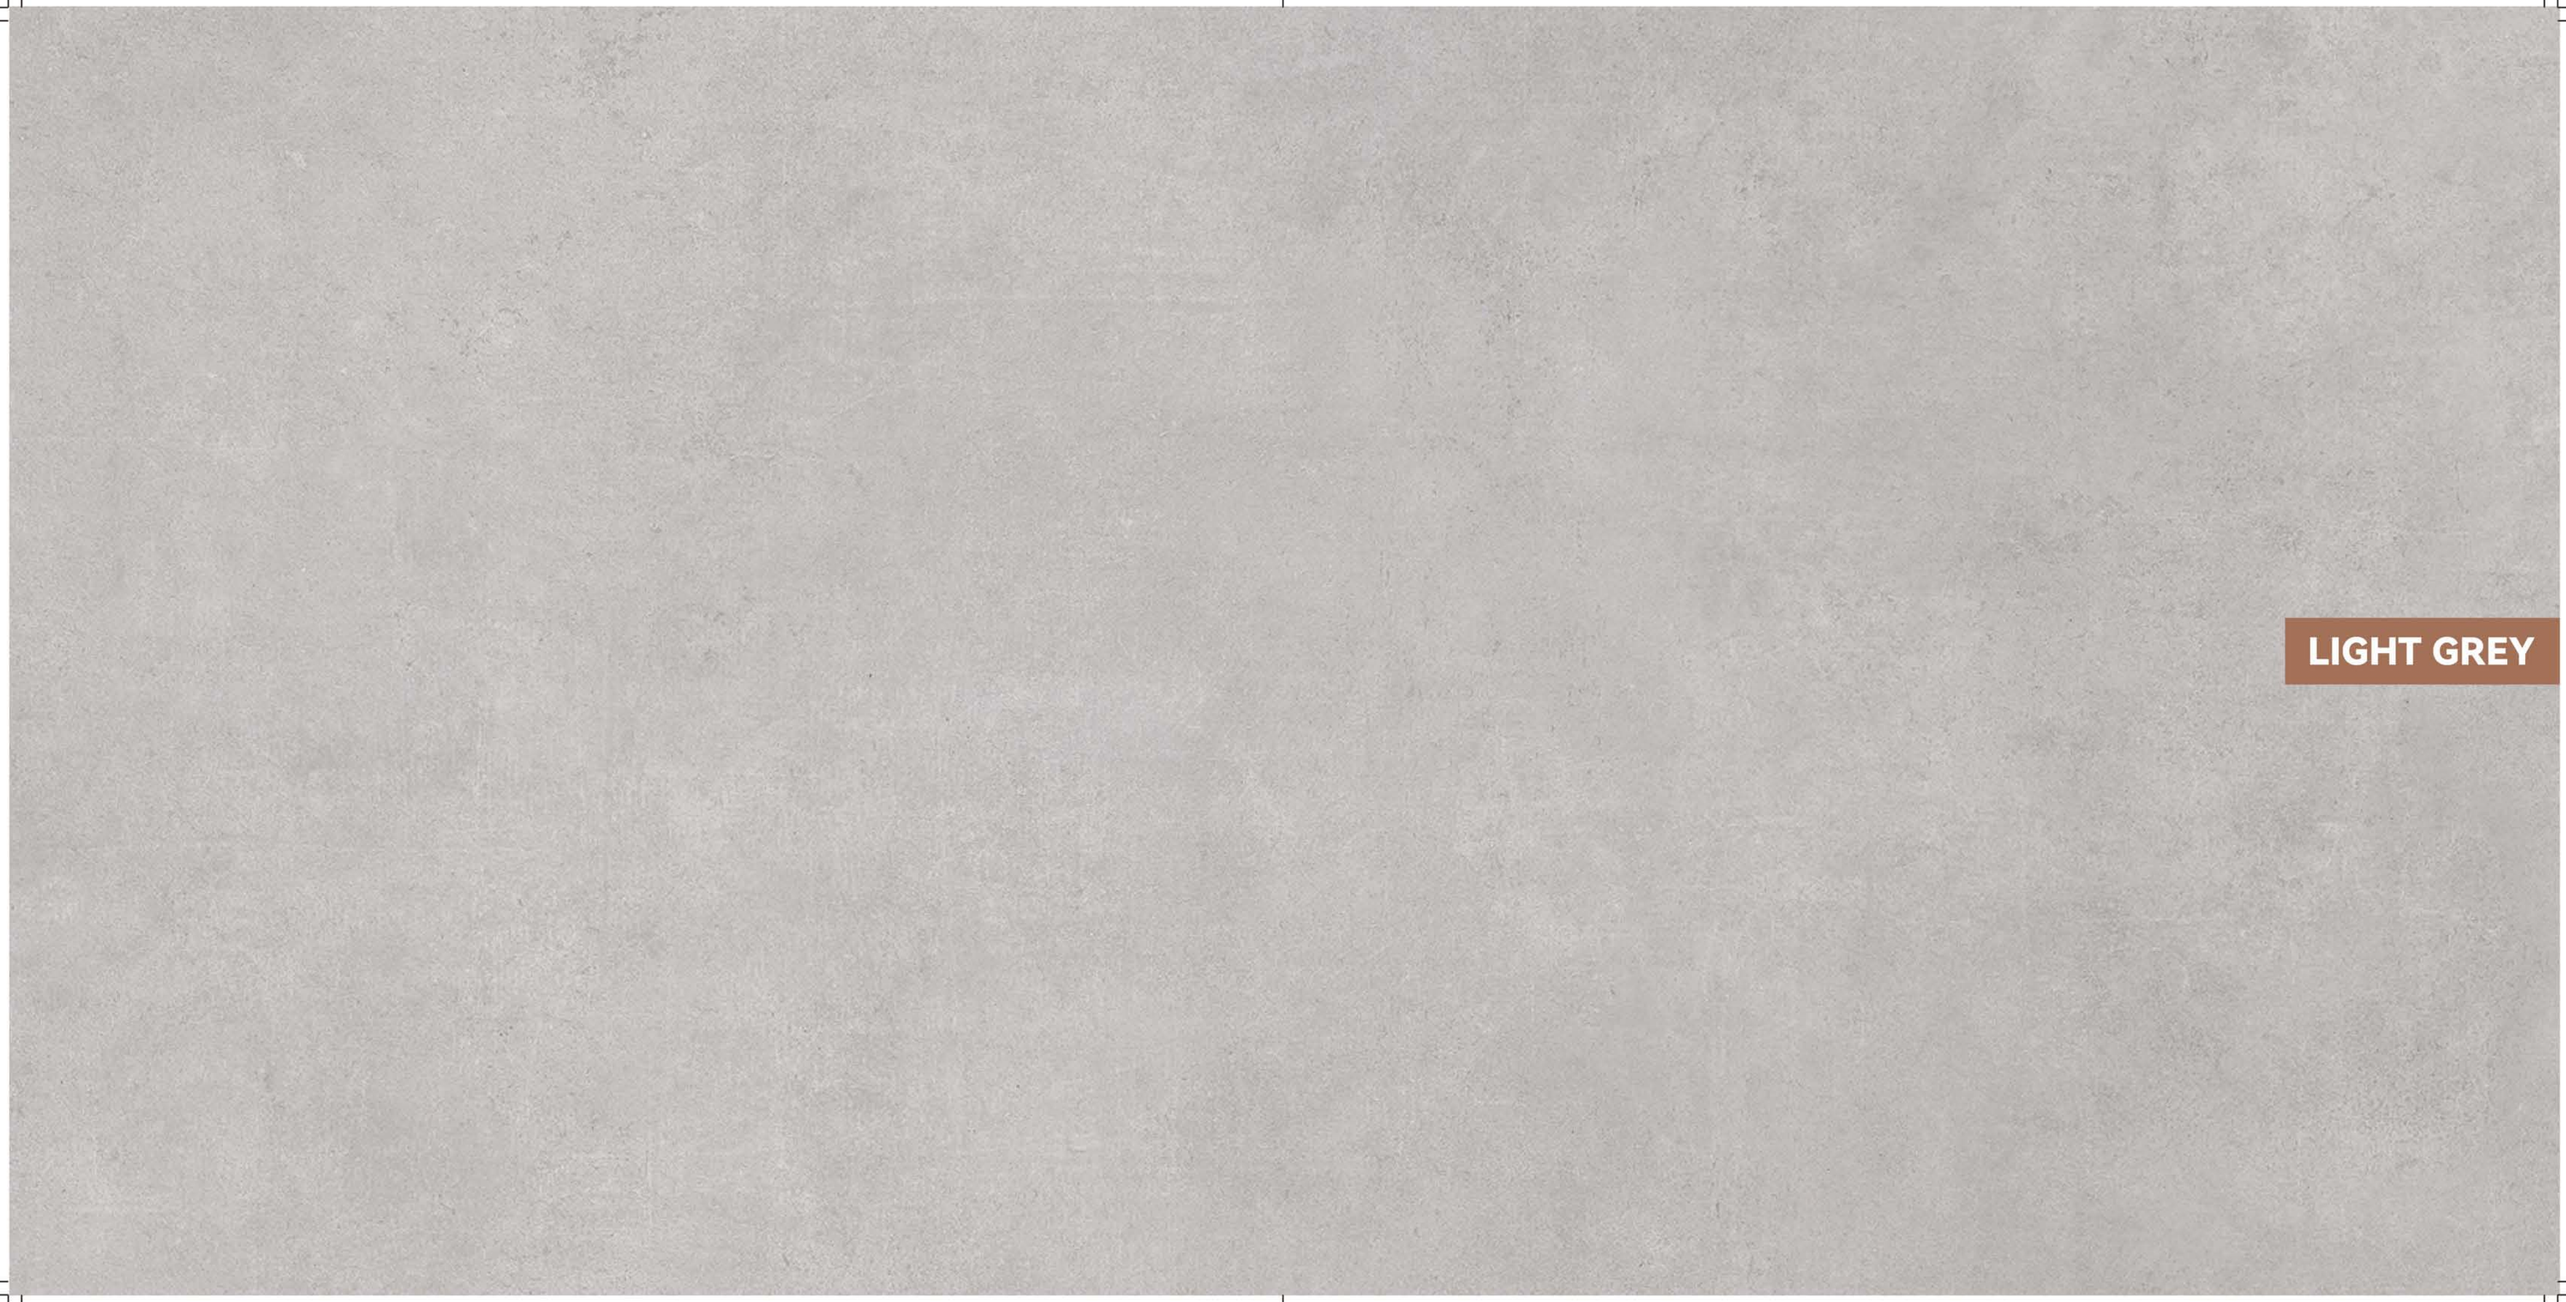



LIGHT GREY

LIGHT GREY

NAT **NATURALE** GP **GRIP** SURFACE

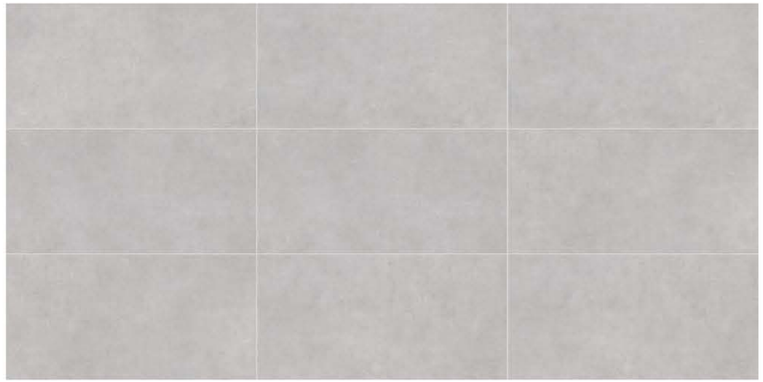

600X1200MM BB126C81

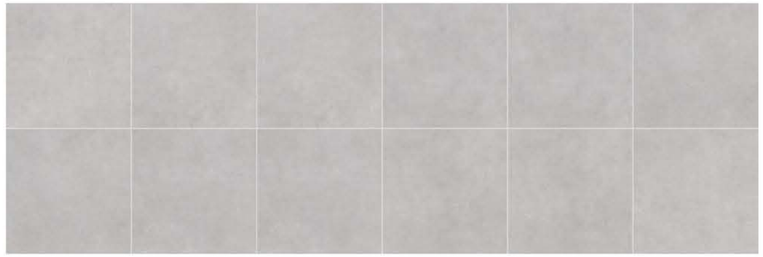

600X600MM BB60C81 **300X600MM** BB36C81

600X600X20MM BB60C81HGP **300X600X20MM** BB36C81HGP




WALL/ LIGHT GREY / 600X1200MM

LIGHT GREY

WALL


LIGHT GREY/ 600X1200MM

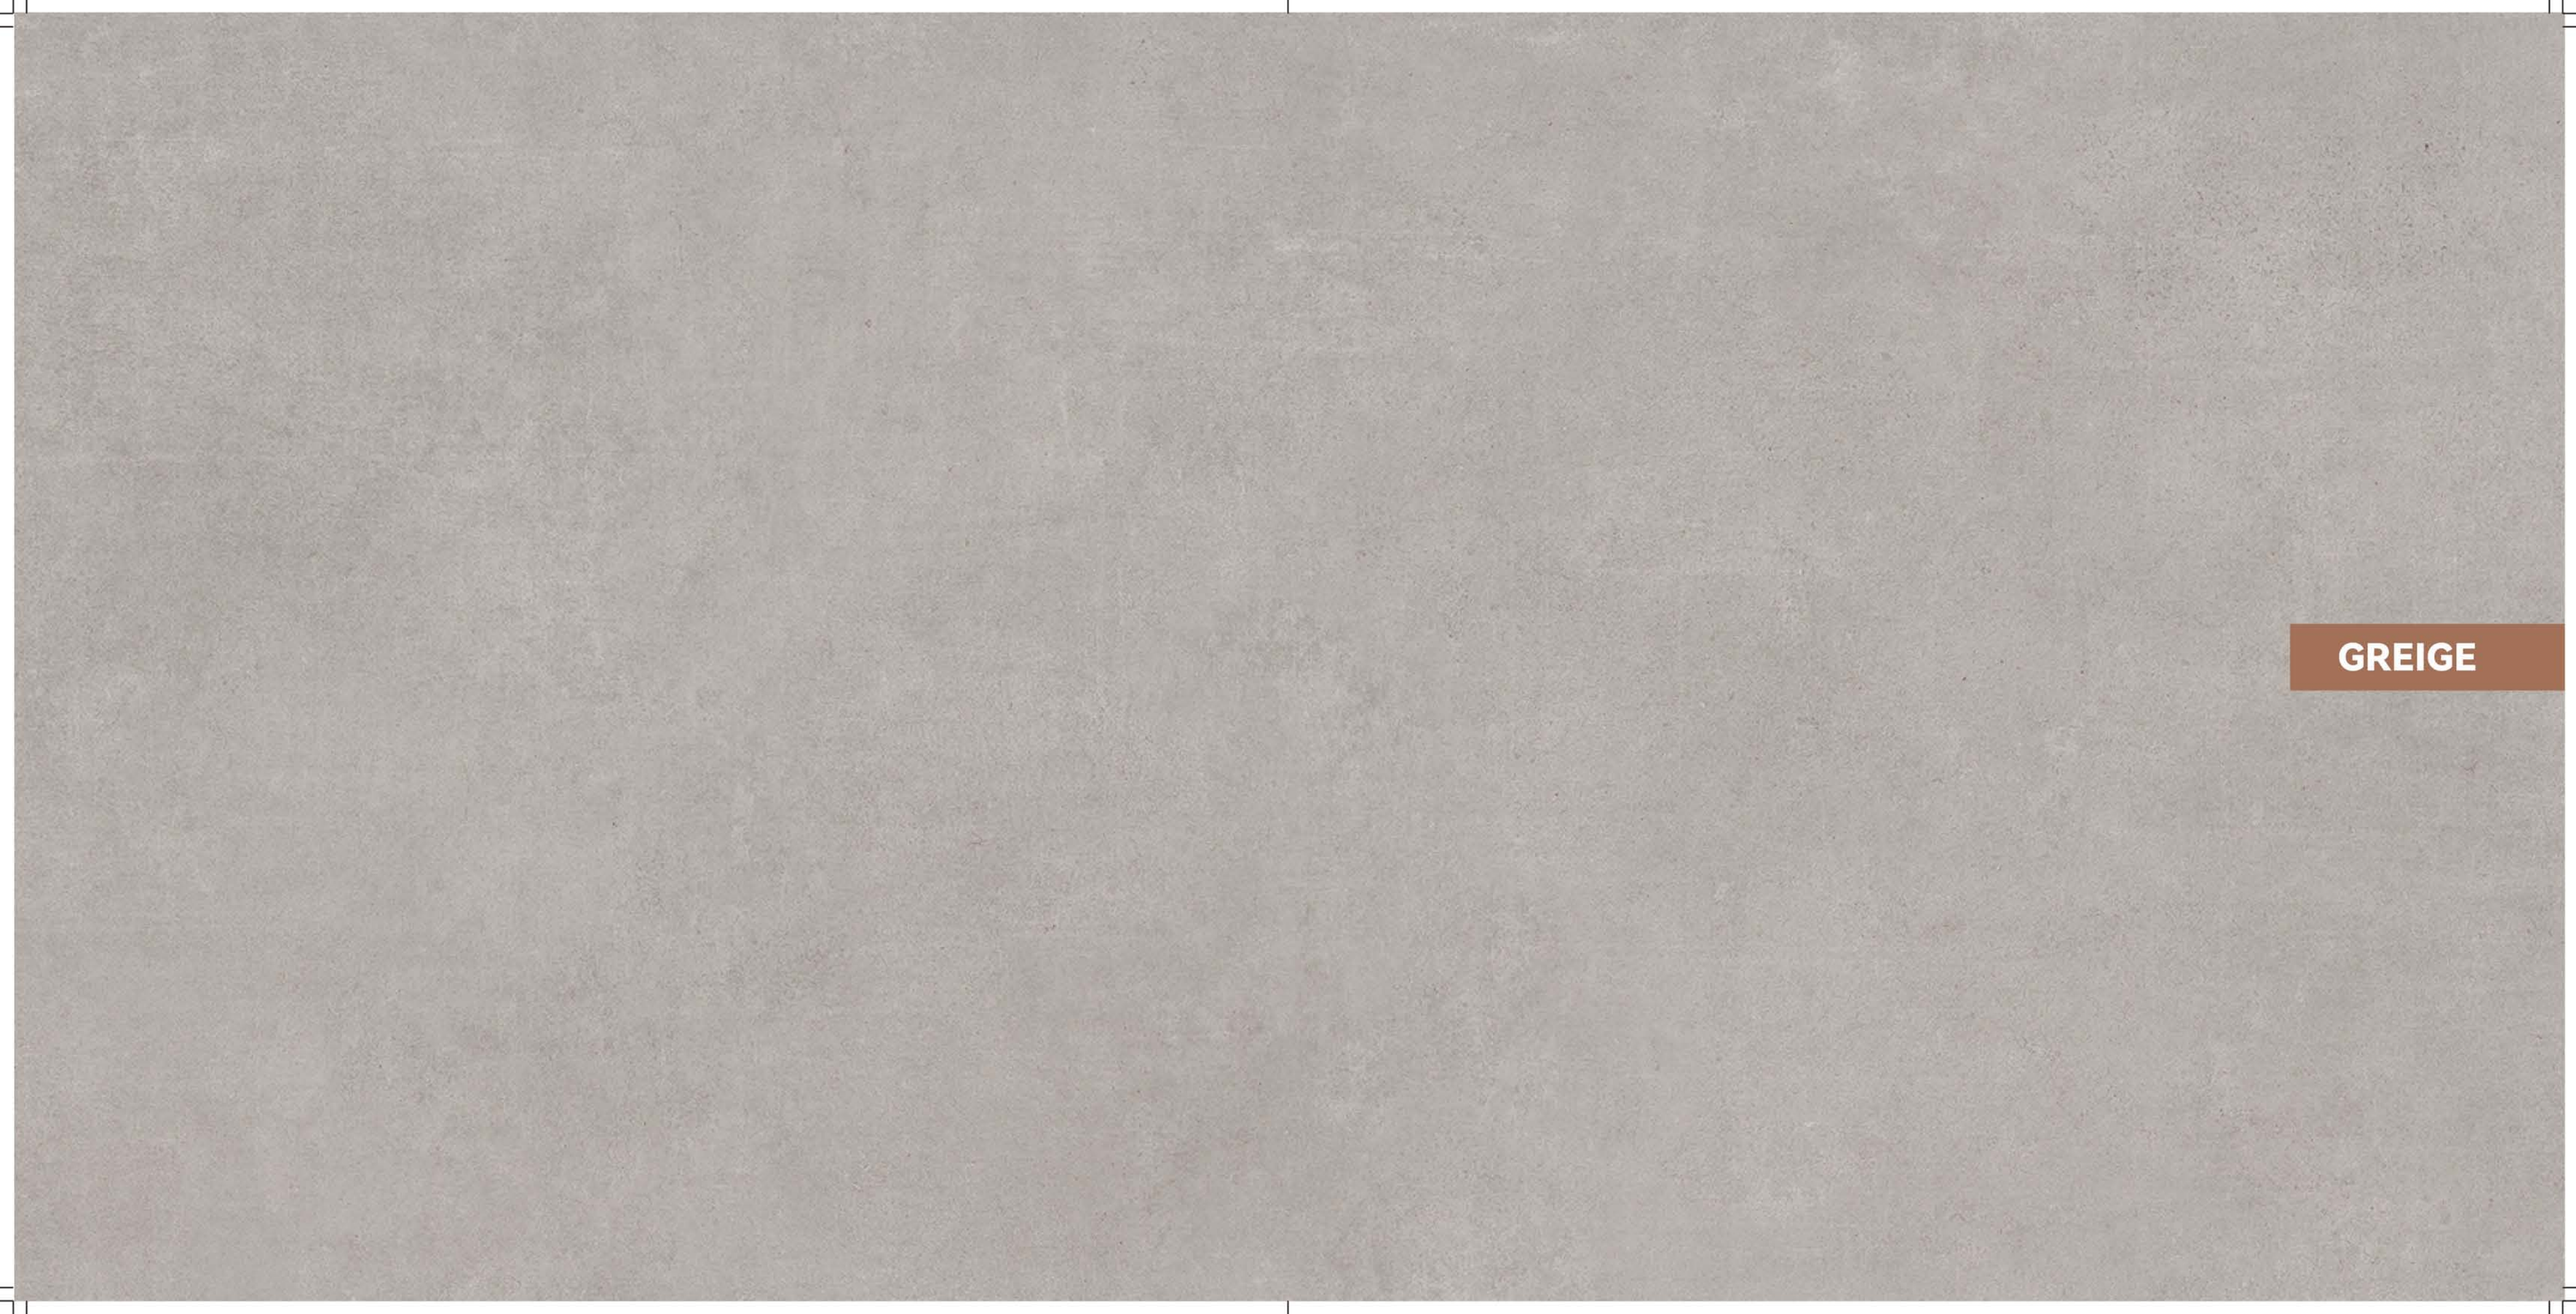



GREIGE

GREIGE

NAT **NATURALE** GP **GRIP** SURFACE

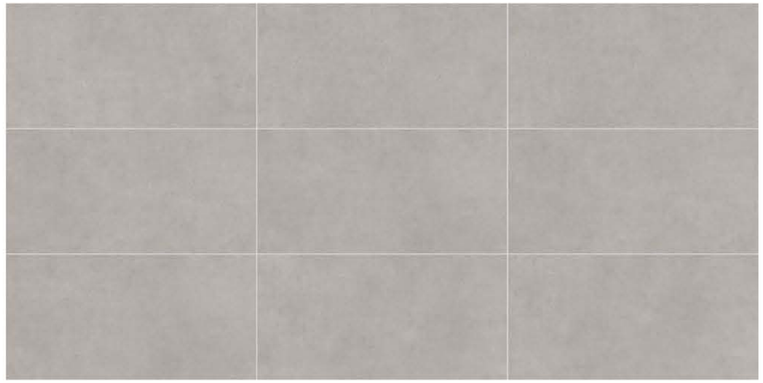

750X1500MM BB1575C82 **600X1200MM** BB126C82

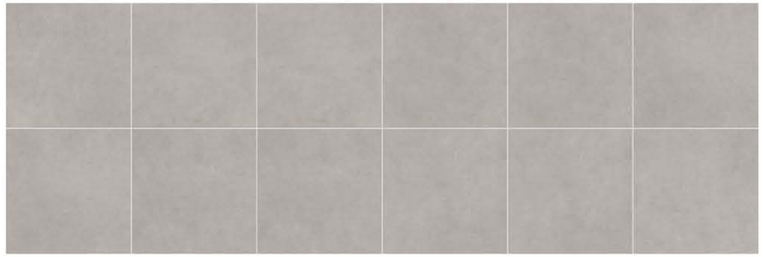

600X600MM BB60C82 **300X600MM** BB36C82

600X600X20MM BB60C82HGP **300X600X20MM** BB36C82HGP




FLOOR/ GREIGE / 600X600MM

GREIGE

FLOOR

GREIGE/ 750X1500MM

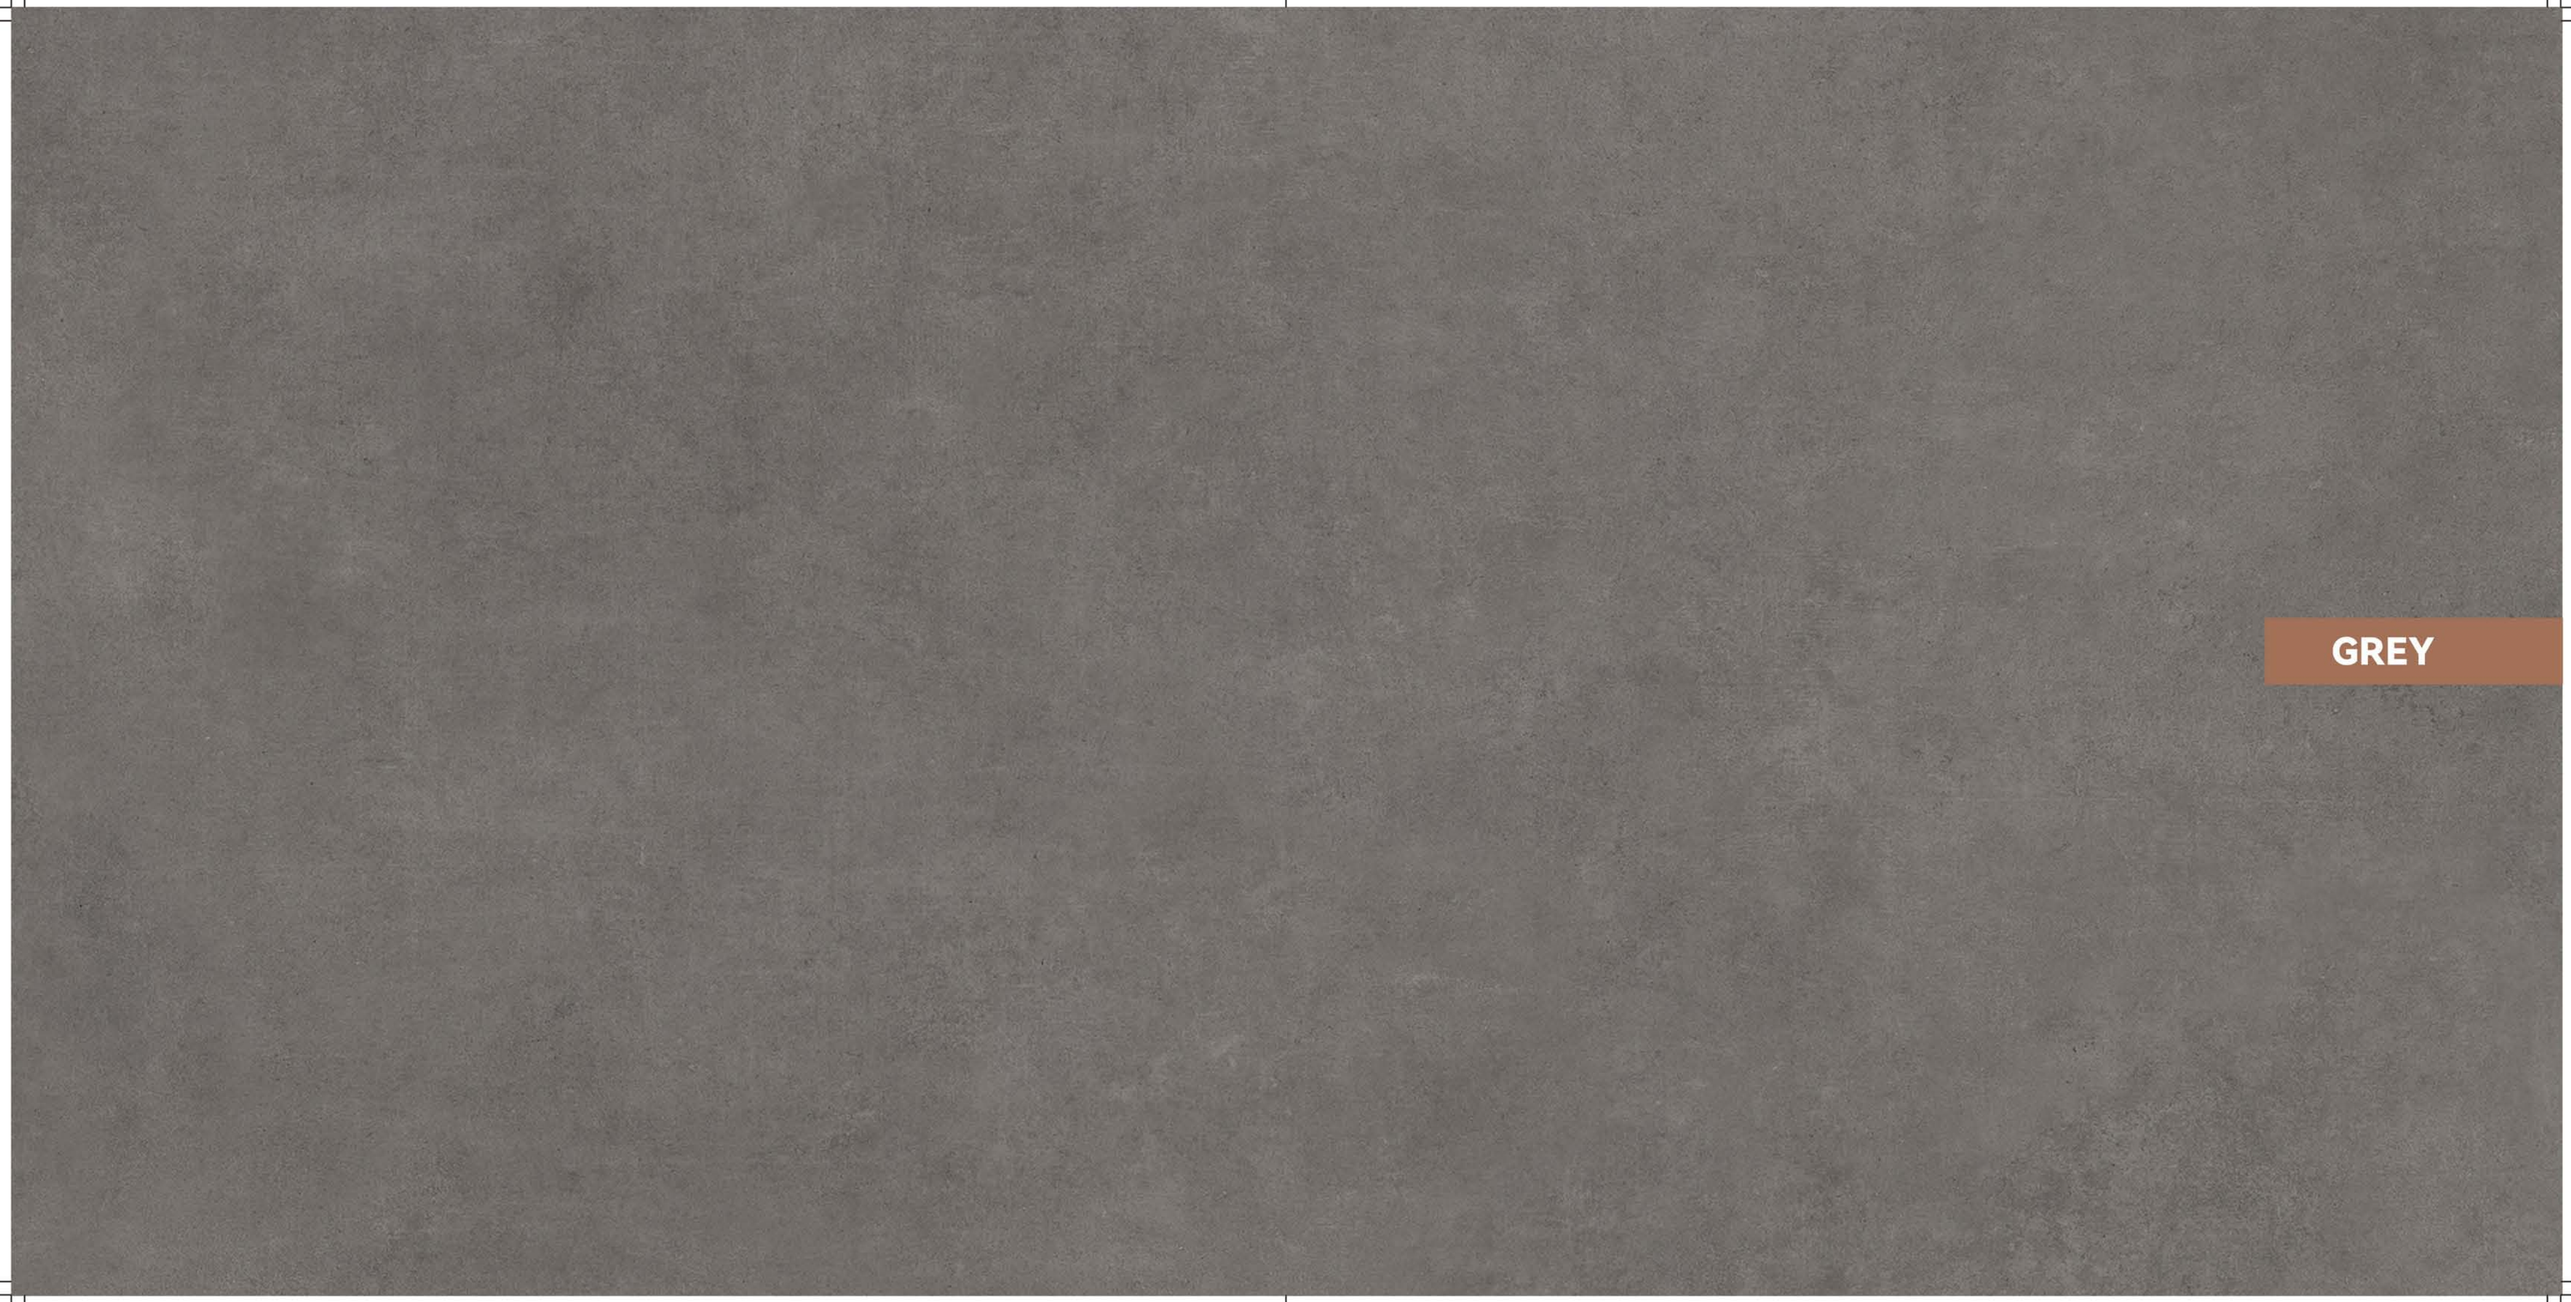



GREY

GREY

NAT **NATURALE** GP **GRIP** SURFACE



750X1500MM BB1575C83 **600X1200MM** BB126C83

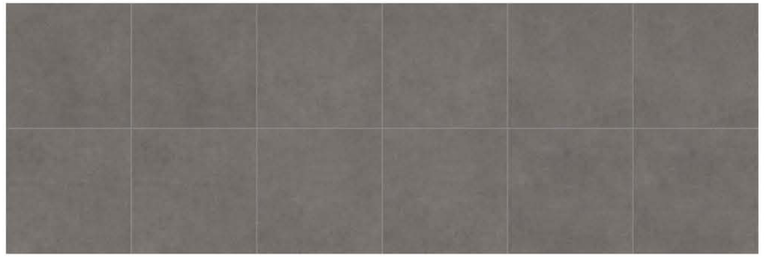

600X600MM BB60C83 **300X600MM** BB36C83

600X600X20MM BB60C83HGP **300X600X20MM** BB36C83HGP



WALL/ GREY / 750X1500MM

GREY

FLOOR

GREY / 600X1200MM





AMBRE

AMBRE

NATURALE SURFACE



600X1200MM BB126C86

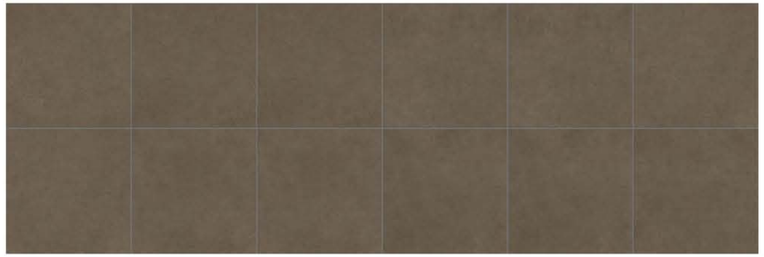

600X600MM BB60C86 **300X600MM** BB36C86




FLOOR/ AMBRE / 600X1200MM

AMBRE

FLOOR

AMBRE / 600X1200MM

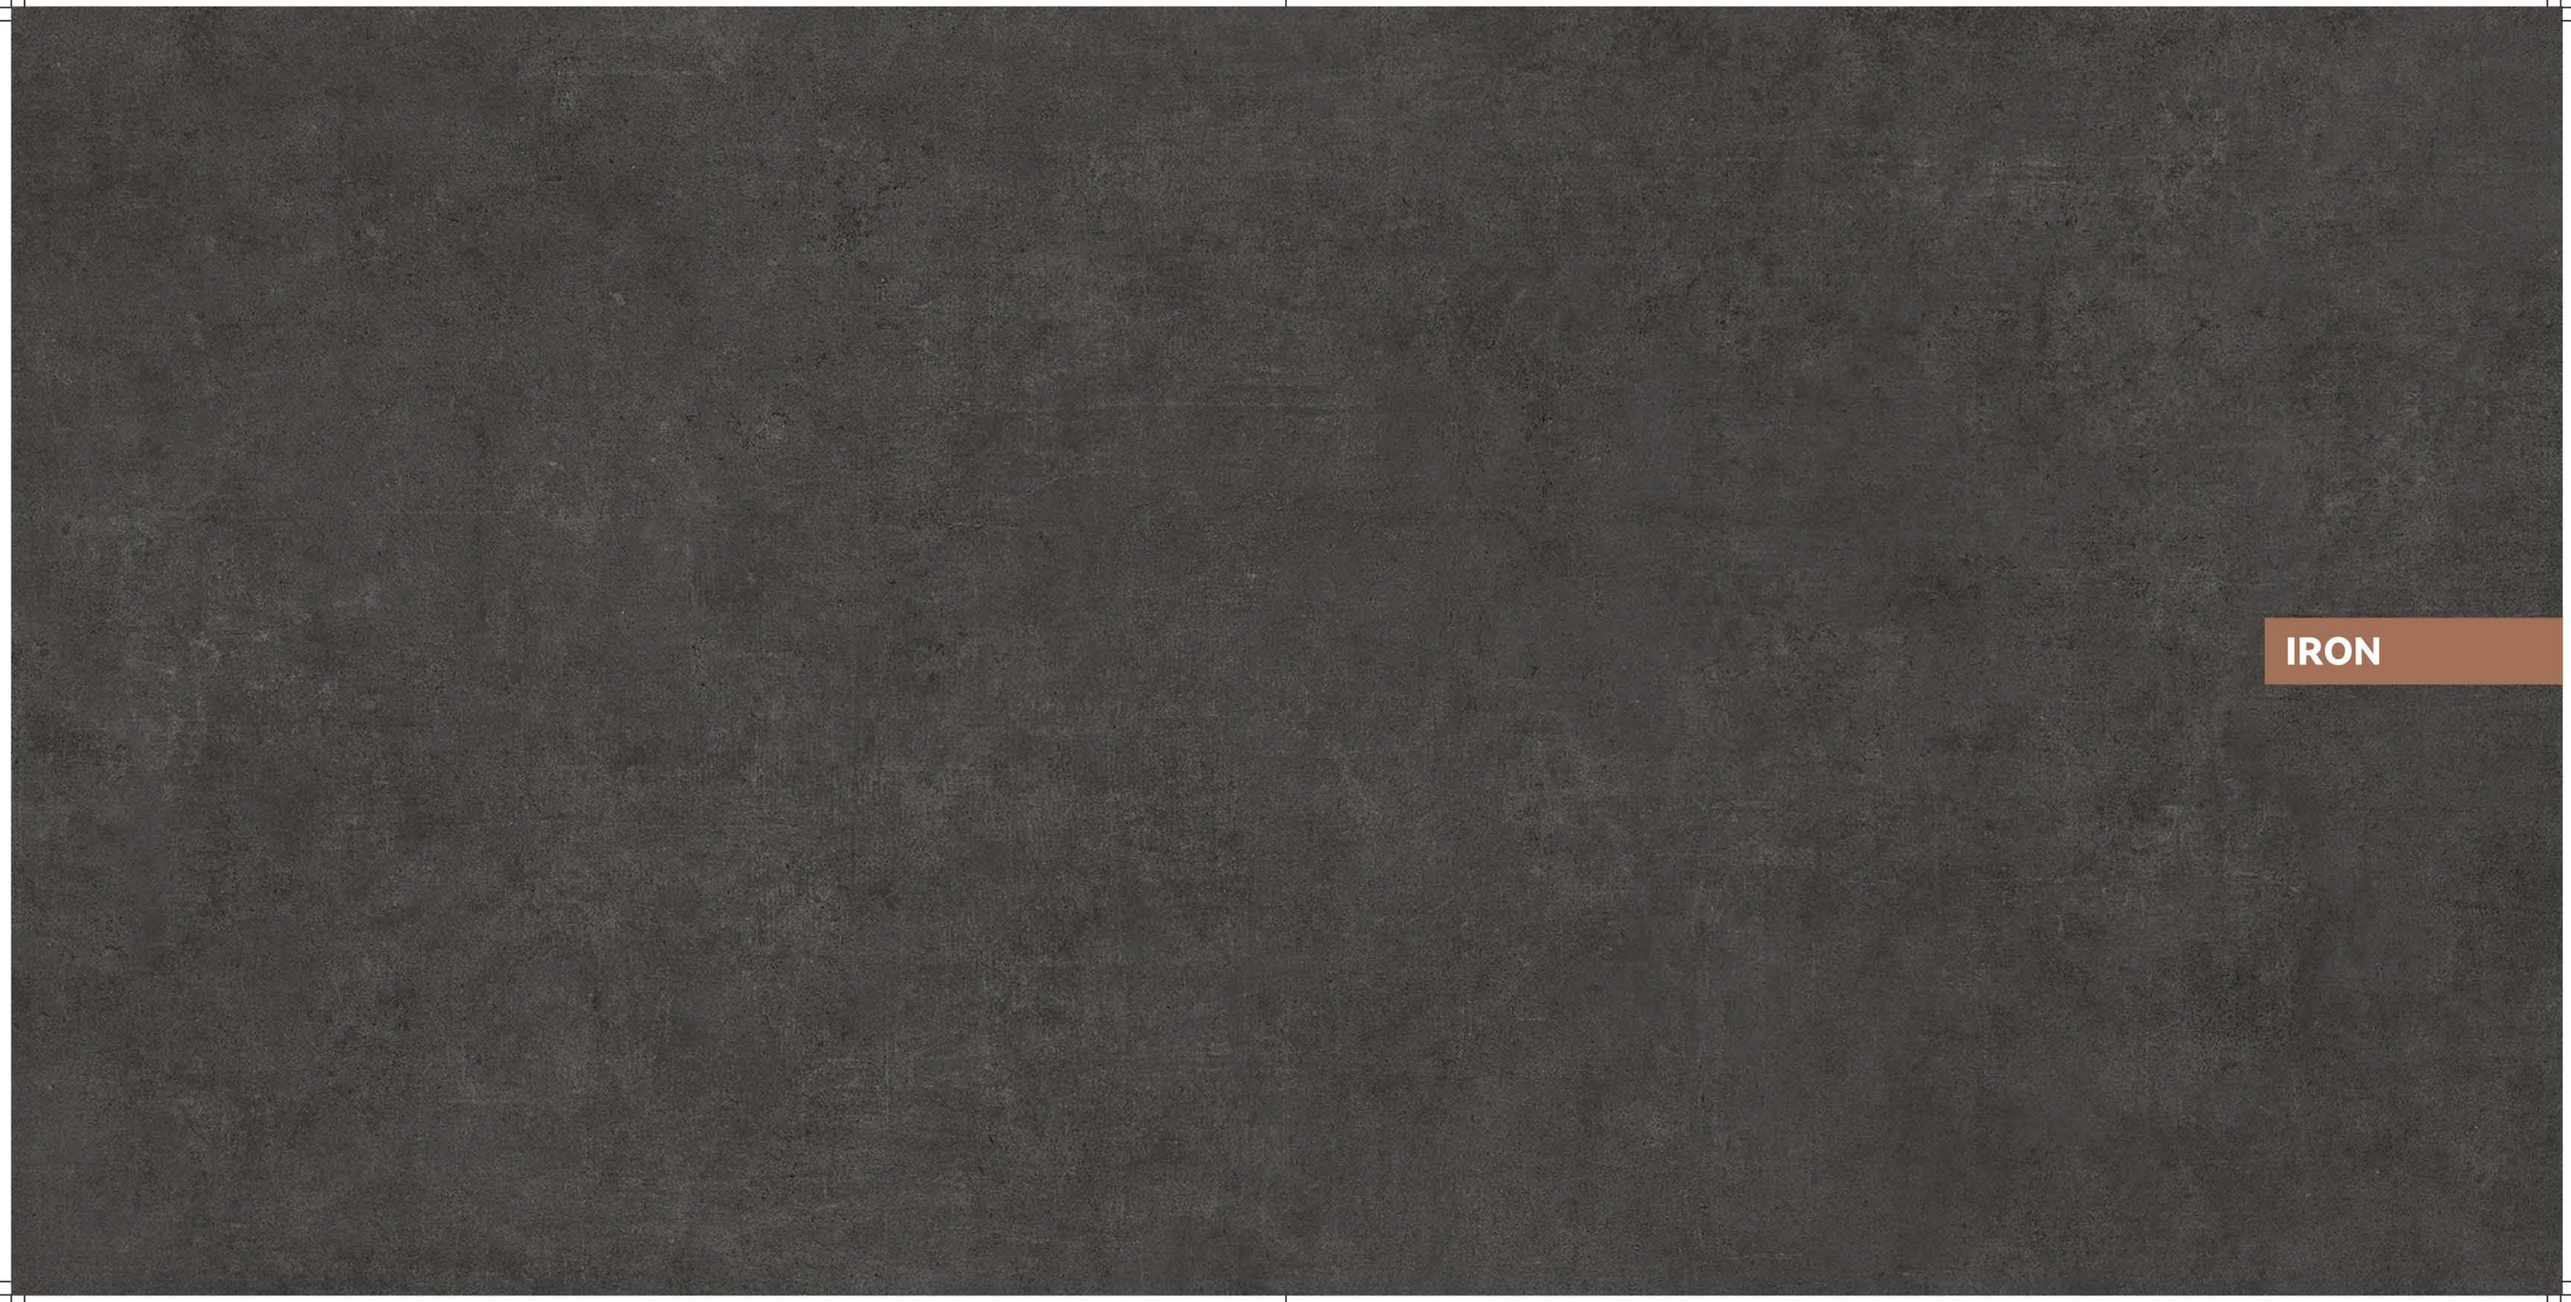



IRON

IRON

NATURALE SURFACE



600X1200MM BB126C88

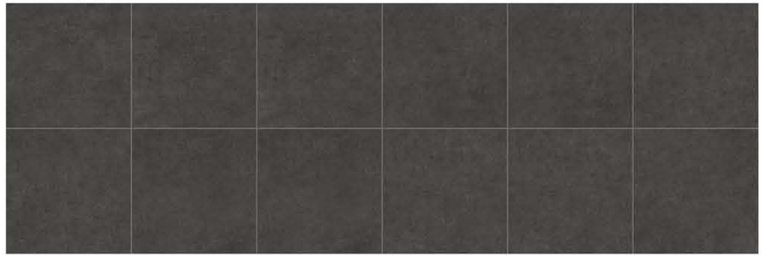

600X600MM BB60C88 **300X600MM** BB36C88



WALL/ IRON / 600X1200MM

IRON

FLOOR

IRON/ 600X1200MM



TECHNICAL CHARACTERISTICS

TECHNICAL CHARACTERISTICS		TEST METHOD	REQUIRED VALUE	DAUGRES VALUE [Average]
Length and Width	DIMENSIONS	GB/T 3810.2 ISO 10545.2	± 0.6%	± 0.2%
Thickness			± 5%	± 3%
Straightness of sides			± 0.5%	± 0.2%
Rectangularity			± 0.5%	± 0.2%
Surface flatness			±2.0MM Maximum	±0.5MM
Water Absorption		GB/T 3810.3 ISO 10545.3	Average maximum ≤0.5%	≤0.3%
Breaking Strength		GB/T 3810.4 ISO 10545.4	When the thickness ≥7.5mm,the mean value shall not be less than 1300N	Conformed
Modulus of Rupture		GB/T 3810.4 ISO 10545.4	Average maximum ≥35MPa	≥38MPa
Stain Resistance		GB/T 3810.14 ISO 10545.14	Minimum Class 3	Class 5
Chemicals Resistance		GB/T 3810.13 ISO 10545.13	Minimum GB	GA
Static coefficient of friction		GB/T 4100-2015(Annex M)	Individual ≥0.50	≥0.60
Crazing resistance		GB/T 3810.11 ISO 10545.11	No crazing or peeling on the glazed surface after the crazing test	Conformed
Slip Resistance		DIN 51130: 2014	Declared Value	Naturale R10 / Grip R11

