CERAMICA DAUGRES ITALIA S.R.L.
Fiorano Modenese (mo)via Pedemontana 100 Cap 41042 Italy

DAUGRES(CHINA)
Block 7, NO.88 Zhongshan 6th Road, Torch Development Zone Big Data Center, Zhongshan, Guangdong,P.R.China.

WESTPORT

DAUGRES

Italian Design

HIGH STYLE & ITALIAN DESIGN

The design of Daugres products is realized in Italy. Through creativity, technical skills and Italian culture, Daugres designs cutting-edge surfaces, always up with interior design trends.

The "Italian Design" brand distinguishes all the collections thought and designed in Italy to promote an innovative product, with unsurpassable aesthetic qualities, immune to fashion and time.













WESTPORT

Westport series is inspired by an European town called Westport County Mayo in Ireland. Most of the famous historic buildings there were erected in the 19th century, which is the transition period from Masonry Structure to Concrete Structure in the Western Architecture history. Therefore, Daugres designer integrated the characteristics of masonry and concrete into the product design, reframes a more uniform and dense granular base to reproduce the original texture of cement, meanwhile, imposes the random white spots on the surface to arouse the ideology of quartz secretly. Westport series is just like a contemporary painting with a classical sense, presents you an unique aesthetic feeling of rationality without losing sensibility.

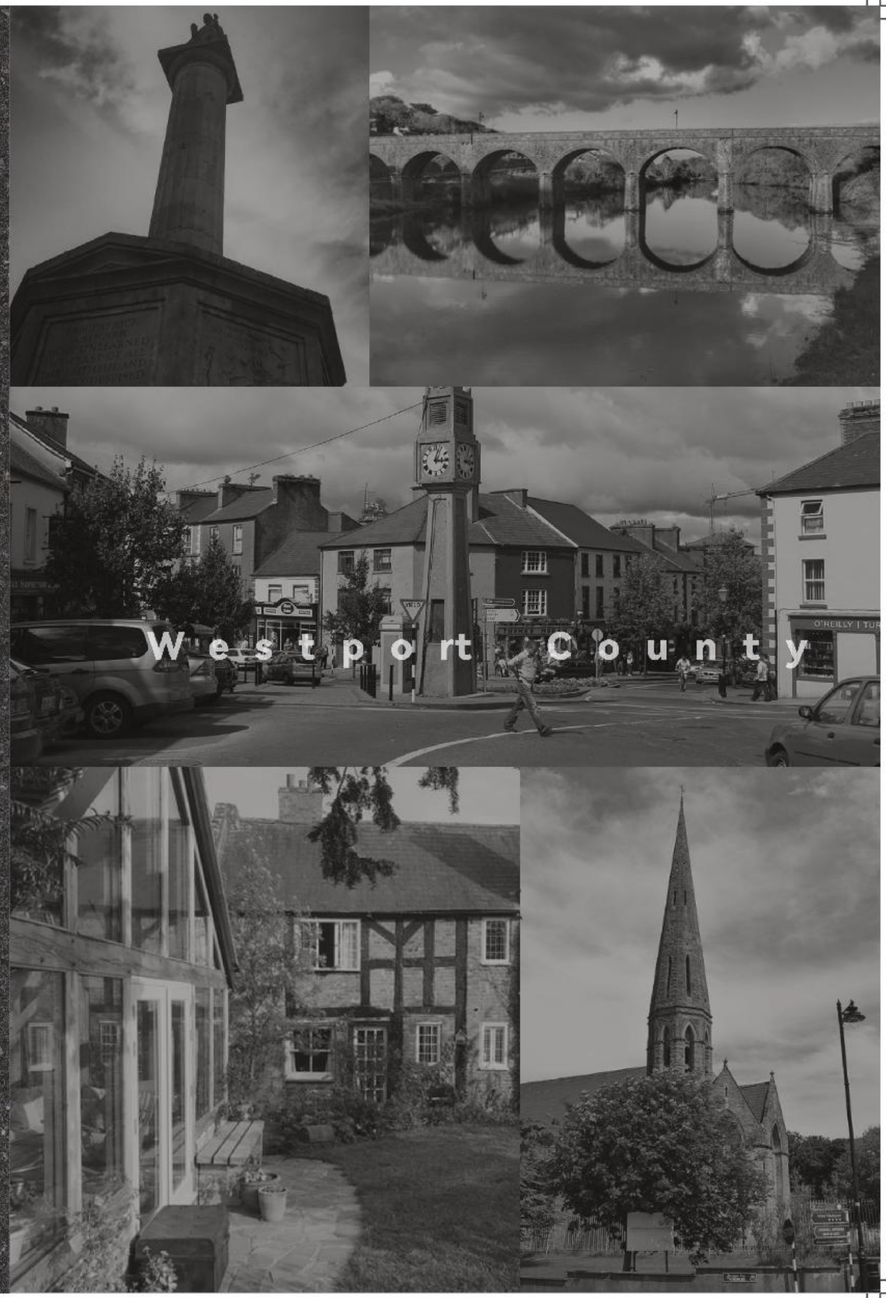

SIZE INDEX

600X1200
10.3mm

600X600
9.5mm

WESTPORT

Contemporary **Collection**



BIANCO	SAND	GRIGIO	CARBONE
NAT	NAT	NAT	NAT
NAT	NAT	NAT	NAT

TECHNICAL CHARACTERISTIC

WATER ABSORPTION | STAIN RESISTANCE | SURFACE ABRASION | CHEMICALS RESISTANCE | BREAKING STRENGTH

SURFACE

NAT NATURALE

PACKAGING

Size	mm Thickness	Pcs/Box	M²/Box	Kg/Box	Boxes/PLT	M²/PLT	Kg/PLT
600x600 / 600x1200							
600×600mm	9.5	4	1.44	30.00	40	57.60	1220.00
600×1200mm	10.3	2	1.44	33.00	64	92.16	2132.00
600×1200mm	10.3	2	1.44	33.00	40	57.60	1340.00



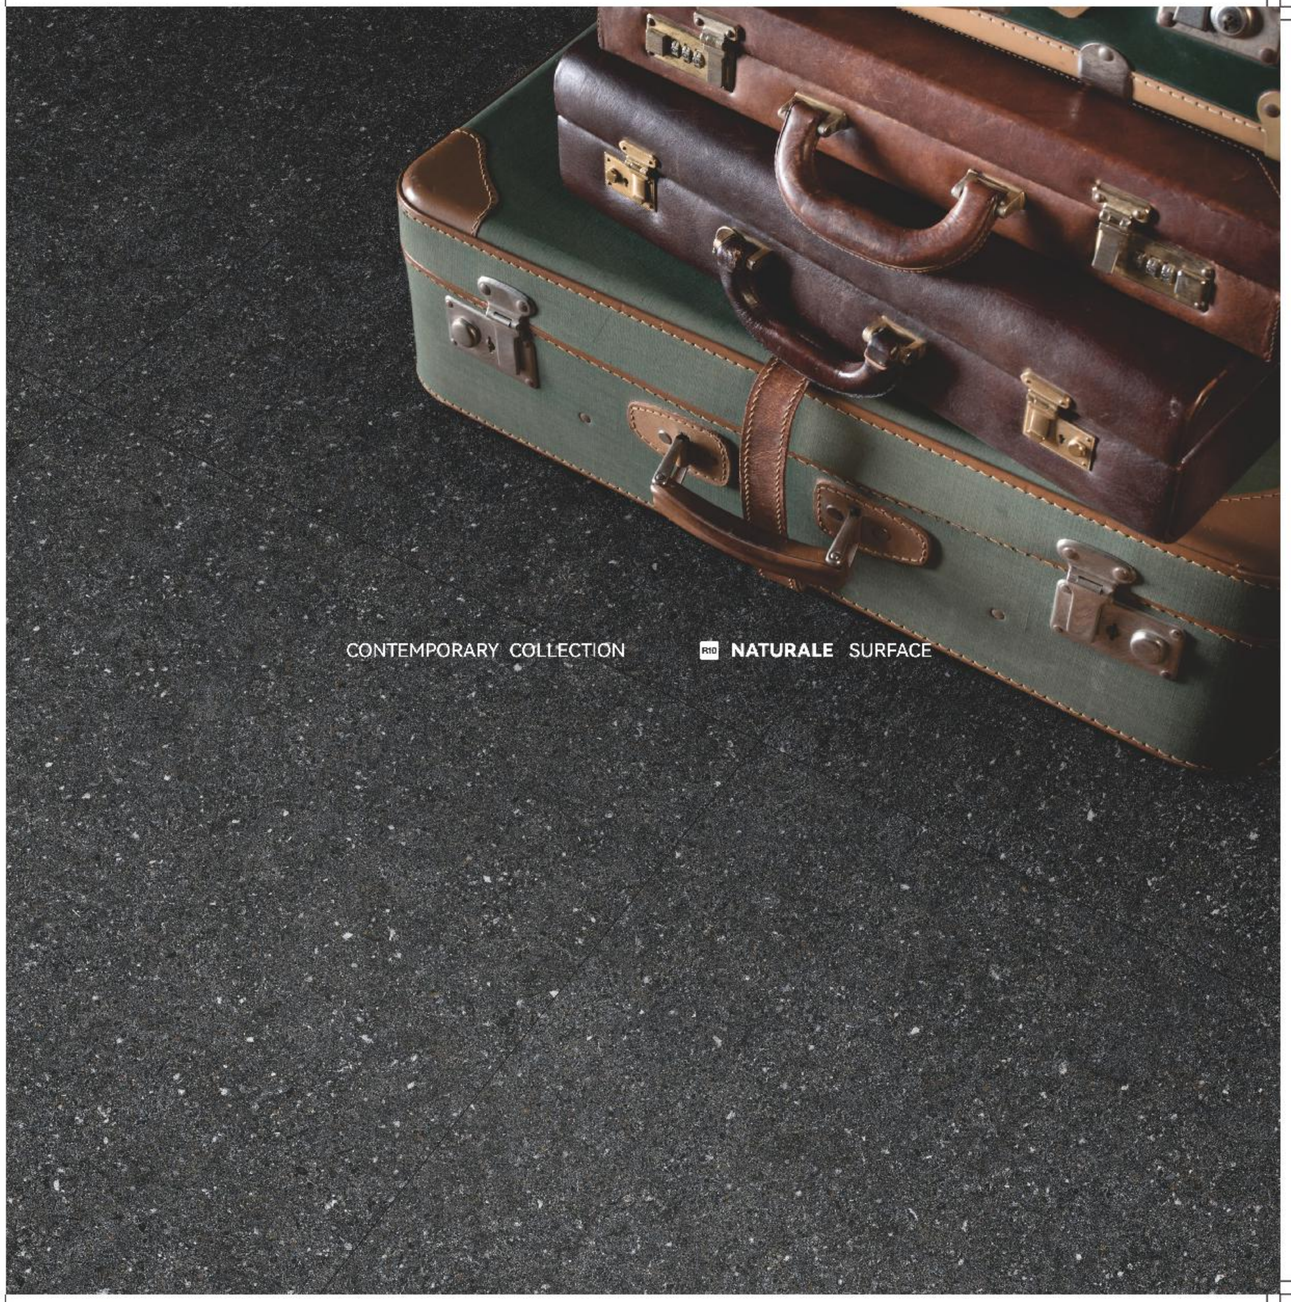



FLOOR / SAND / BS126W12 / 600X1200MM



FLOOR / BIANCO / BS126W10 / 600X1200MM



FLOOR / SAND / BS126W12 / 600X1200MM

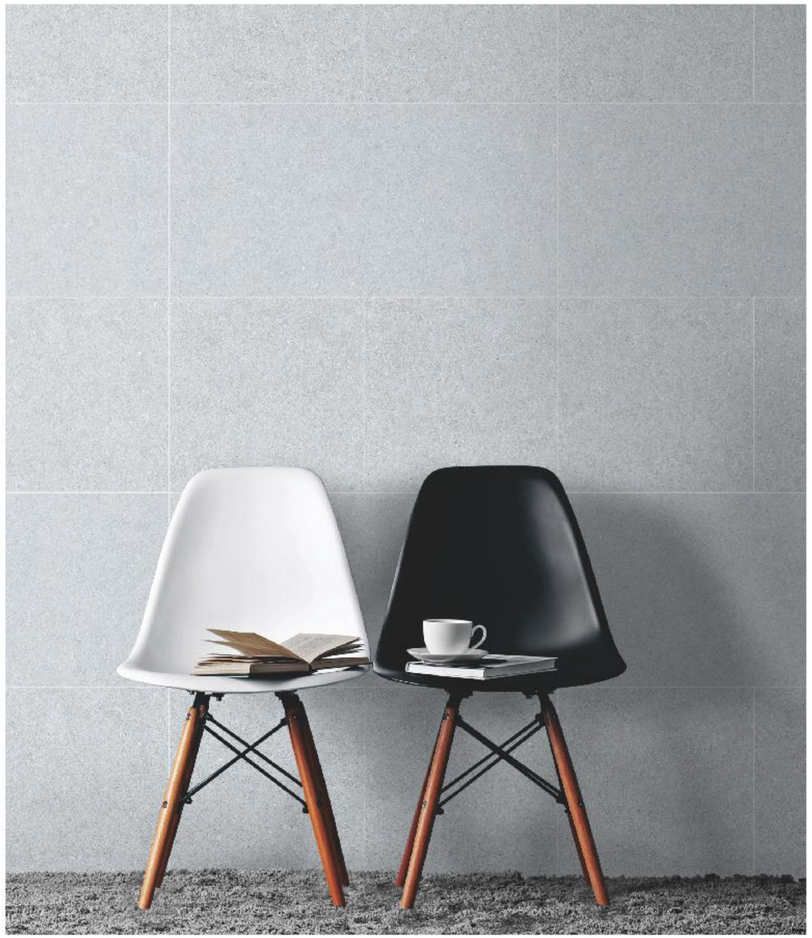

WALL / GRIGIO / BS66W13 / 600X600MM / BS126W13 / 600X1200MM



FLOOR / SAND / BS66W12 / 600X600MM



FLOOR / BIANCO / BS66W10 / 600X600MM



FLOOR / CARBONE / BS126W17 / 600X1200MM



WALL / CARBONE / BS66W17 / 600X600MM GRIGIO / BS66W13 / 600X600MM **FLOOR /** GRIGIO / BS66W13 / 600X600MM



FLOOR / CARBONE / BS66W17 / 600X600MM



BIANCO

600X600MM
BS66W10

600X1200MM
BS126W10

NATURALE SURFACE



SAND

600X600MM
BS66W12

600X1200MM
BS126W12

NATURALE SURFACE





GRIGIO

600X600MM
BS66W13

600X1200MM
BS126W13

FHO **NATURALE** SURFACE

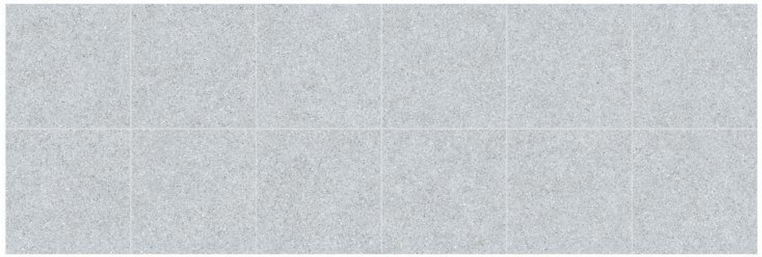

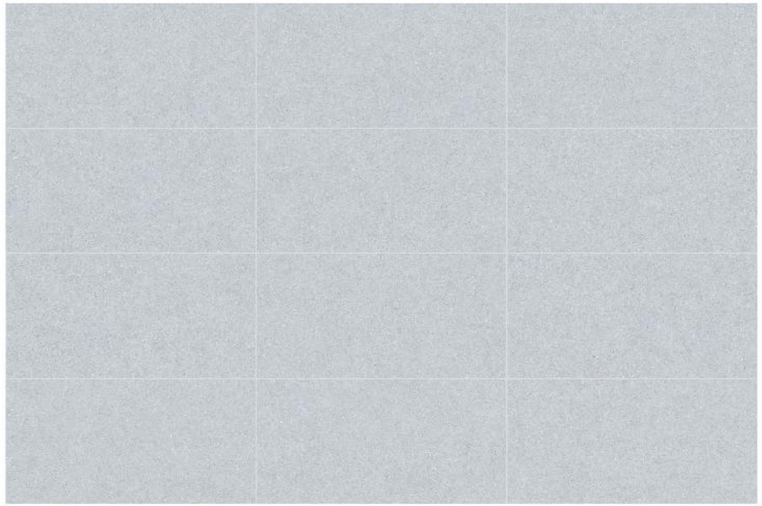

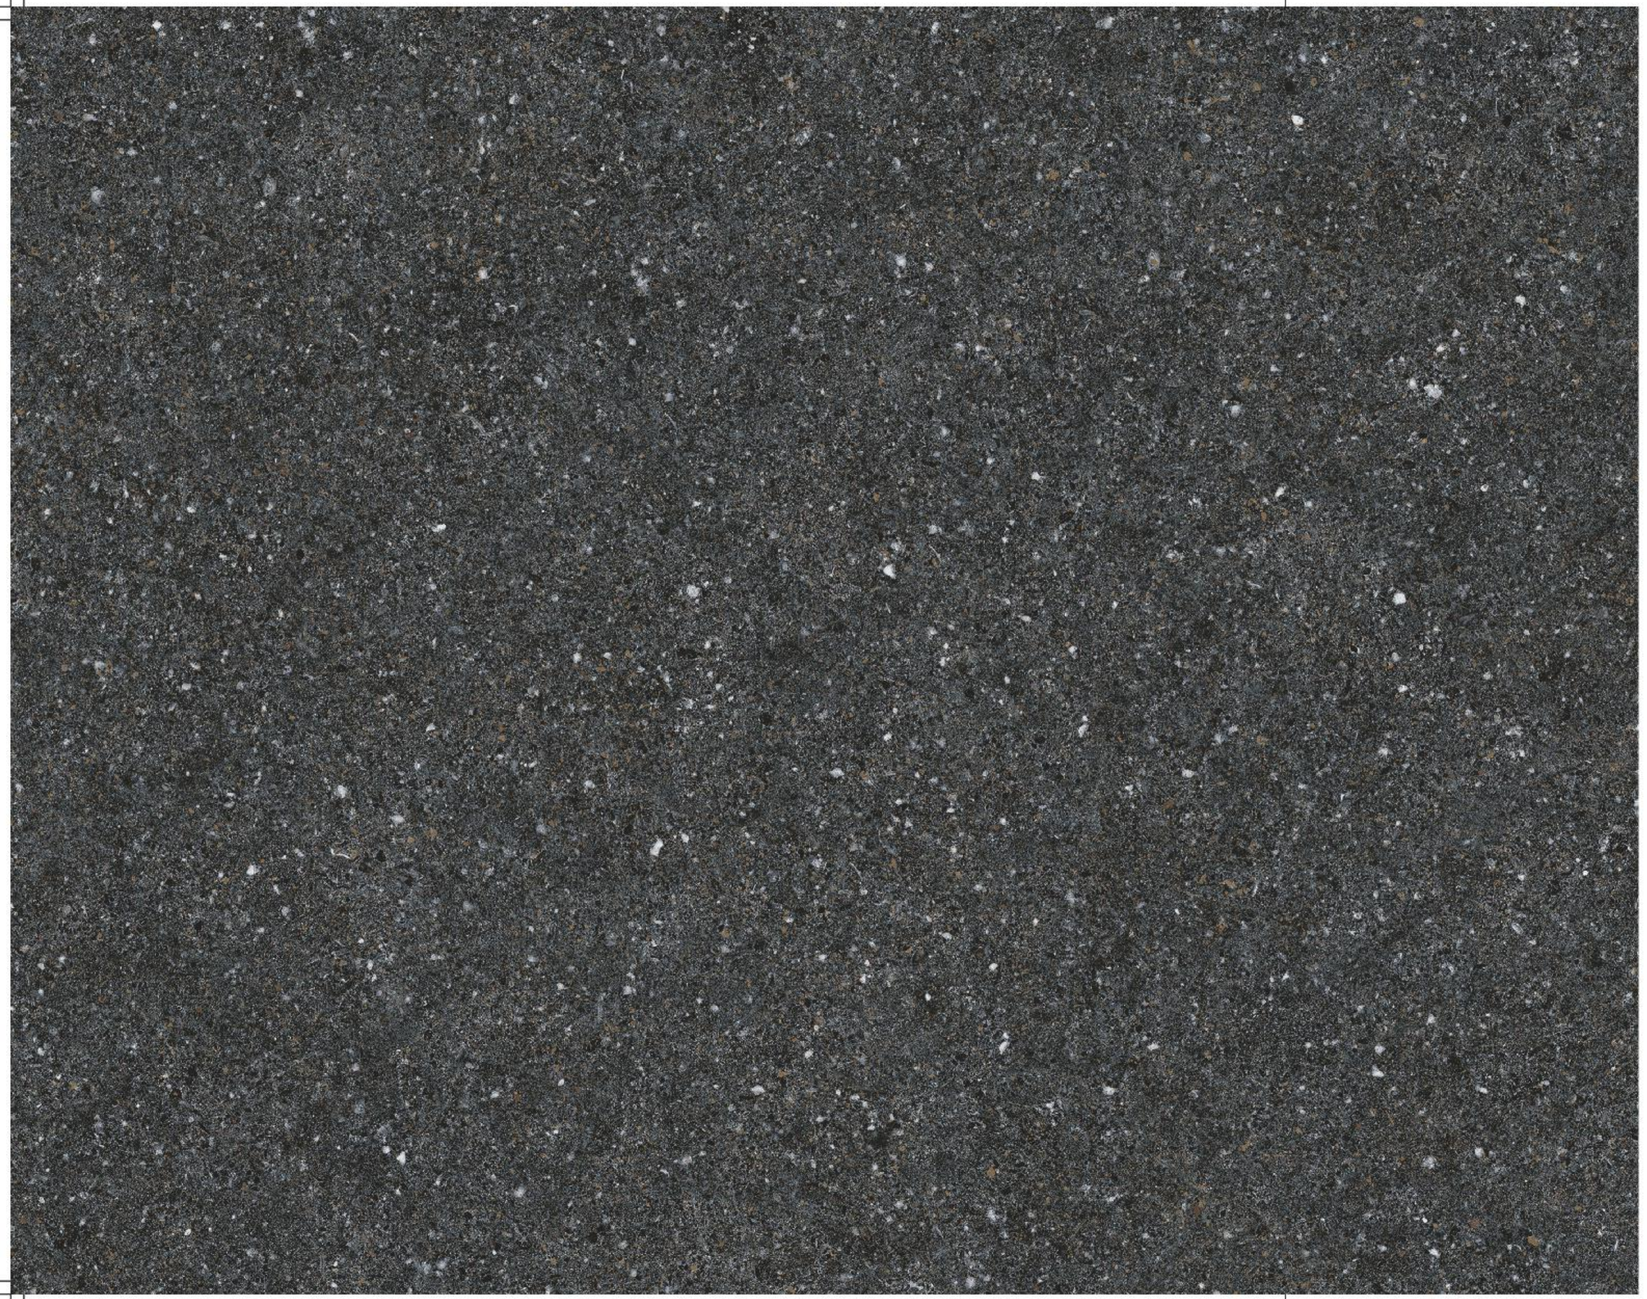

CARBONE

600X600MM
BS66W17

600X1200MM
BS126W17

FNO **NATURALE** SURFACE

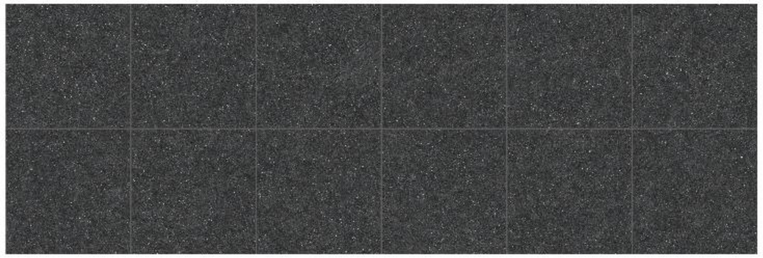

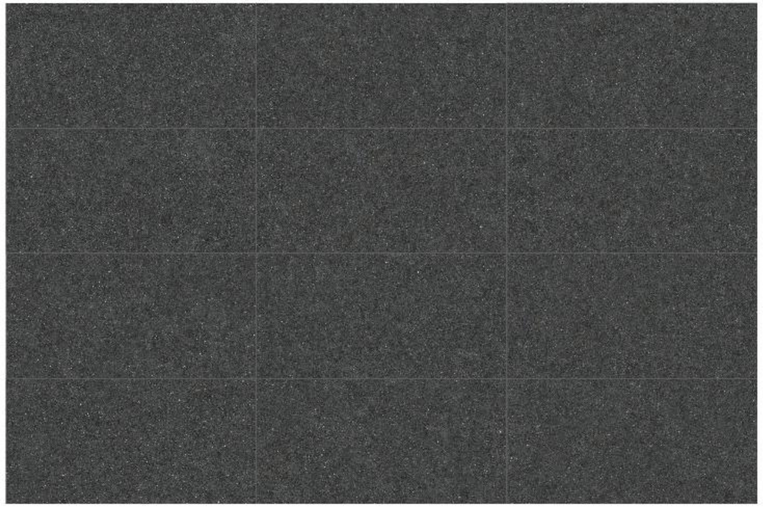

TECHNICAL CHARACTERISTICS

TECHNICAL CHARACTERISTICS		TEST METHOD	REQUIRED VALUE	DAUGRES VALUE [Average]
Length and Width	DIMENSIONS	GB/T 3810.2 ISO 10545.2	± 0.6%	± 0.2%
Thickness			± 5%	± 3%
Straightness of sides			± 0.5%	± 0.2%
Rectangularity			± 0.5%	± 0.2%
Surface flatness			±2.0MM Maximum	±0.5MM
Water Absorption		GB/T 3810.3 ISO 10545.3	Average maximum ≤0.5%	≤0.3%
Breaking Strength		GB/T 3810.4 ISO 10545.4	When the thickness ≥ 7.5mm,the mean value shall not be less than 1300N	Conformed
Modulus of Rupture		GB/T 3810.4 ISO 10545.4	Average maximum ≥35MPa	≥38MPa
Stain Resistance		GB/T 3810.14 ISO 10545.14	Minimum Class 3	Class 5
Chemicals Resistance		GB/T 3810.13 ISO 10545.13	Minimum GB	GA
Static coefficient of friction		GB/T 4100-2015(Annex M)	Individual ≥0.50	≥0.60
Crazing resistance		GB/T 3810.11 ISO 10545.11	No crazing or peeling on the glazed surface after the crazing test	Conformed
Slip Resistance		DIN 51130: 2014	Declared Value	R10

